

MX PRO 1 TUNNEL

MAIN CHARACTERISTICS

Applications	Tunnel lighting.
Optic	AS-xx: Asymmetrical optics for reinforcement lighting of road tunnels. TS-xx: Symmetrical optics for reinforcement and permanent lighting of road tunnels. SV: Asymmetrical optics extra narrow beam. STE-S / STU-S: Asymmetrical narrow-emission optics. STE-M / STU-M: Asymmetrical medium emission optics. STW / STA / STA1: Asymmetrical optics wide emission. S05 / S07: Asymmetrical optics extra-wide emission. Colour temperature: 4000K (others optional) CRI≥70 LOR= 100%, DLOR= 100%, ULOR= 0% Photobiological safety class: EXEMPT GROUP LED source efficiency: 185 lm/W @ 140mA, Tj=85°C, 4000K
Insulation class	II, I
Protection degree	IP66/IP67 IK09
Dimensions	See the drawing
Weight	max 5kg (without fixing flange)
Exposed surface	Bracket A: Side: 0.024m ² - Top: 0.121m ² Bracket C: Side: 0.030m ² - Top: 0.146m ²
Mounting	Mounting with integrated bracket for universal channel or ceiling mounting. Optional: adjustable bracket for channel from 100x75mm to 300x75mm with quick release.
Tilt Angle	0°. Other inclinations on request.
LED Modules	Removable / Replaceable.
Gear tray	Tool-free opening of wiring compartment. Removable wiring.
Operating temp.	-40°C / +55°C
Storage temp	-40°C / +80°C
Main reference standards	EN 60598-1, EN 60598-2-3, EN 60598-2-5, IEC 62471, PD EPRS 003 / EN 62722-2-1 2016 EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3




ELECTRICAL CHARACTERISTICS

Rated voltage	220÷240V 50/60Hz (Standard tolerance +/-10%, other voltages and tolerances upon request)
Power factor	>0,95 (at full load - F)
Mains connection	Cable: FG16-OM16 0.6/1kV L=1.5 m (other types on request) F / ZHAGA: 2x1,5mm ² (CL.II) / 3x1,5mm ² (CL.I) DALI: 4x1,5mm ² (CL.II) / 5x1,5mm ² (CL.I) Optionally: Fireproof cable FTG18-OM16 0.6/1kV L=1.5 m Optionally: plug IEC309 2P+E 16A IP67 (other types on request) Optionally: separate Network/Control Cables: Network: 2/3x1,5mm ² / DALI: 2x1,5mm ²
Surge protection	Up to 12kV With SPD: CL.II: 10kV / 10kV CM/DM CL.I: 12kV / 10kV CM/DM Without SPD: CL.II: 10kV / 6kV CM/DM CL.I: 10kV / 6kV CM/DM
SPD (optional)	12kV-10kA, type 2+3, with LED signal and thermo fuse to disconnect load at the end of life.
Control system (options)	F: Fixed power not dimmable. DALI: Digital dimming interface DALI. ZHAGA: Socket 4 pin (ZHAGA Book 18). FLC: Constant light flux.
Optical unit lifetime (Tq=25°C)	>100.000hr L90B10 >100.000hr L90, TM-21


MATERIALS

Fixing	AISI 304 Stainless steel with thermoplastic galvanic insulators.
Lower frame	Die-cast aluminum UNI EN1706 powder painted.
Upper canopy	Extruded aluminium with stainless steel spring.
Closure hook	Extruded aluminium with stainless steel spring.
Optic	99.85% aluminum with a surface finish in 99.95% with vacuum-sealed deposition. Aluminum grade class A+ (DIN EN 16268)
Screen	Flat tempered glass, 4mm thickness high transparency.
Cable gland	Metallic M20x1.5 / M25x1.5 - IP68
Gasket	Polyurethane without joints.
Colour	Graphite - Cod. 01

BRACKET A DIMENSIONAL DRAWINGS

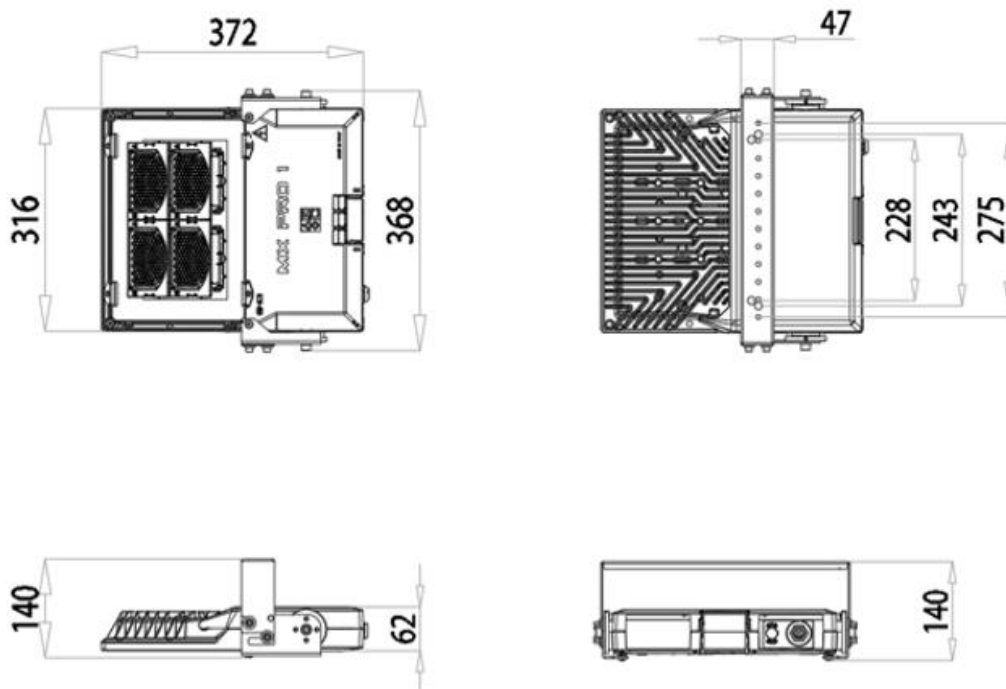


DETAIL OF FIXING BRACKETS

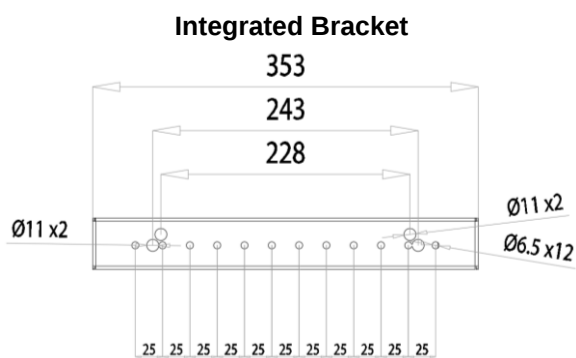

Bracket weight: 1 kg


Quick Release Bracket (Option)



Accessory Weight: 1.8 kg

The bracket is supplied unmounted in the unit.

EXAMPLES OF APPLICATION

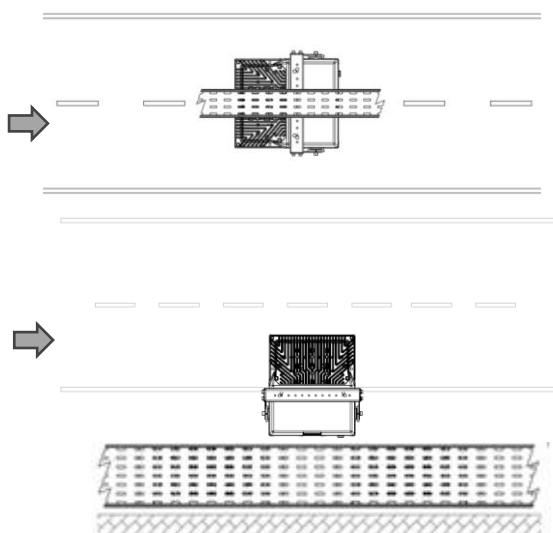

Assembly

Central channel, Offset channel
Luminaire in axis with the channel.

Optics used

AS-xx


Assembly

Lateral ceiling mounting.
Luminaire rotated 90°


Optics used

STx-x

BRACKET C DIMENSIONAL DRAWINGS

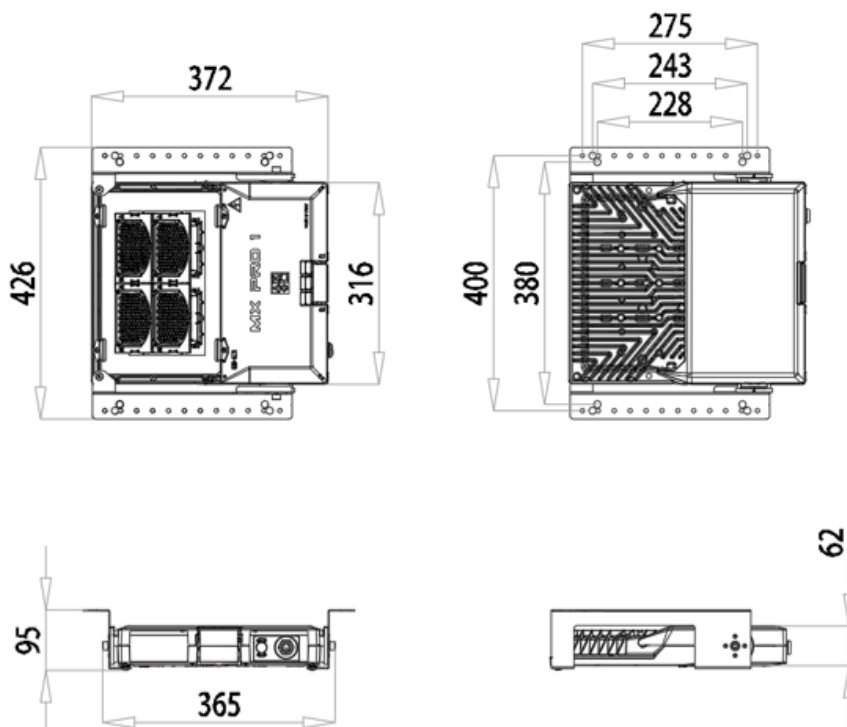


DETAIL OF FIXING BRACKETS

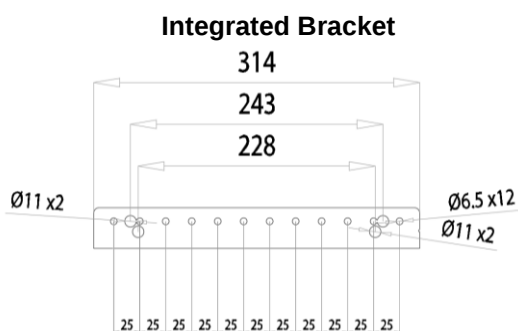

Bracket weight: 0.8 kg


Quick Release Bracket (Option)



Accessory Weight: 1.8 kg

The bracket is supplied unmounted in the unit.

EXAMPLES OF APPLICATION

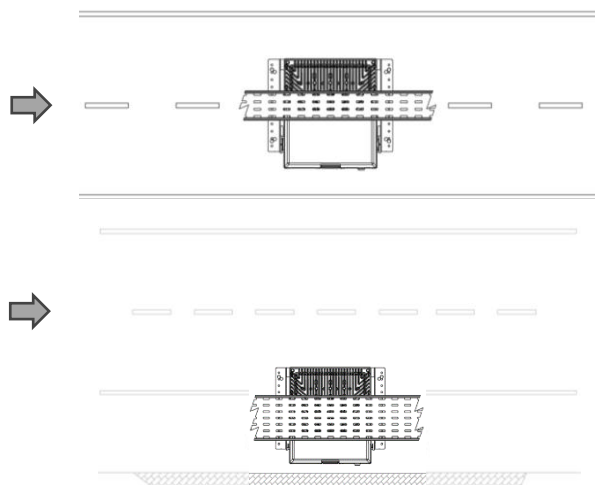

Assembly

Central channel, Offset channel.
Luminaire rotated 90°.

Optics used

TS-xx


Assembly

Lateral channel mounting.
Luminaire rotated by 90°.

Optics used

STx-x

EXTERNAL CABLE DETAILS

ELECTRICAL CHARACTERISTICS		SAMPLE PICTURE
Type	FG16-OM16	
Rated voltage U0/U	0,6/1kV	
Operating temperature range	Up to 90°C	
Sheath Colour	Green	
Smoke Emission	LS0H (Low-Smoke Zero Halogen)	
CPR classification	C _{ca} -s1b, d1, a1	
Outer diameter	2P 12mm – 5P 14,4mm	

FIREPROOF EXTERNAL CABLE DETAILS (Option)

ELECTRICAL CHARACTERISTICS		SAMPLE PICTURE
Type	FTG18-OM16	
Rated voltage U0/U	0,6/1kV	
Operating temperature range	Up to 90°C	
Sheath Colour	Blue	
Smoke Emission	LS0H (Low-Smoke Zero Halogen)	
CPR classification	B2 _{ca} -s1a, d1, a1	
Outer diameter	2P 12mm – 5P 14,8mm	

MAINS PLUG 2P+T DETAILS (Option)

ELECTRICAL CHARACTERISTICS		SAMPLE PICTURE
Type	IEC309 2P+T 230V 16A	
Typology	Straight Plug	
Materials	External body: Technopolymers (Halogen Free) Pins: Nickel-plated brass	
Poles	2P+T	
Tightening capacity of the cable fastener clamp	7.5 - 13.8mm	
Tightening capacity of the terminals	1-4mm²	
Operating temperature	-25°C / +55°C	
Rated current	16A	
Protection degree	IP67	
Colour	Blue	
Dimension	130mm x Ø72mm	
Note: for only versions F, ZHAGA, DALI WITH SEPARATE CABLES (ONLY ON NETWORK CABLE)		

MX PRO 1 TUNNEL 5P5 4000K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 1 TUNNEL 5P5 7040.100-1M	STA STA1 STU-S S05 S07 STE-S	2830	19,1	148	3023	16	50
MX PRO 1 TUNNEL 5P5 7040.120-1M		3370	22,9	147	3592	19,3	50
MX PRO 1 TUNNEL 5P5 7040.140-1M		3900	26,8	145	4150	22,7	50
MX PRO 1 TUNNEL 5P5 7040.180-1M		4870	34,8	139	5227	29,6	50
MX PRO 1 TUNNEL 5P5 7040.100-2M		5650	37,4	151	6046	31,9	50
MX PRO 1 TUNNEL 5P5 7040.120-2M		6720	44,8	149	7185	38,6	50
MX PRO 1 TUNNEL 5P5 7040.140-2M		7760	52,3	148	8299	45,4	50
MX PRO 1 TUNNEL 5P5 7040.180-2M		9670	67,7	142	10453	59,1	50
MX PRO 1 TUNNEL 5P5 7040.120-3M		10070	65,6	153	10777	57,9	50
MX PRO 1 TUNNEL 5P5 7040.140-3M		11600	76,7	151	12449	68	50
MX PRO 1 TUNNEL 5P5 7040.180-3M		14420	100	144	15680	88,7	50
MX PRO 1 TUNNEL 5P5 7040.140-4M		15260	102	149	16598	90,7	50
MX PRO 1 TUNNEL 5P5 7040.180-4M		18980	132	143	20906	118	50
MX PRO 1 TUNNEL 5P5 7040.100-1M	SV STU-M STE-M STW	2890	19,1	151	3023	16	50
MX PRO 1 TUNNEL 5P5 7040.120-1M		3450	22,9	150	3592	19,3	50
MX PRO 1 TUNNEL 5P5 7040.140-1M		3990	26,8	148	4150	22,7	50
MX PRO 1 TUNNEL 5P5 7040.180-1M		4980	34,8	143	5227	29,6	50
MX PRO 1 TUNNEL 5P5 7040.100-2M		5780	37,4	154	6046	31,9	50
MX PRO 1 TUNNEL 5P5 7040.120-2M		6880	44,8	153	7185	38,6	50
MX PRO 1 TUNNEL 5P5 7040.140-2M		7940	52,3	151	8299	45,4	50
MX PRO 1 TUNNEL 5P5 7040.180-2M		9890	67,7	146	10453	59,1	50
MX PRO 1 TUNNEL 5P5 7040.120-3M		10290	65,6	156	10777	57,9	50
MX PRO 1 TUNNEL 5P5 7040.140-3M		11860	76,7	154	12449	68	50
MX PRO 1 TUNNEL 5P5 7040.180-3M		14750	100	147	15680	88,7	50
MX PRO 1 TUNNEL 5P5 7040.140-4M		15610	102	153	16598	90,7	50
MX PRO 1 TUNNEL 5P5 7040.180-4M		19410	132	147	20906	118	50
MX PRO 1 TUNNEL 5P5 7040.100-1M	AS-45M AS-45N AS-45W	2830	19,1	148	3023	16	50
MX PRO 1 TUNNEL 5P5 7040.120-1M		3370	22,9	147	3592	19,3	50
MX PRO 1 TUNNEL 5P5 7040.140-1M		3900	26,8	145	4150	22,7	50
MX PRO 1 TUNNEL 5P5 7040.180-1M		4870	34,8	139	5227	29,6	50
MX PRO 1 TUNNEL 5P5 7040.100-2M		5650	37,4	151	6046	31,9	50
MX PRO 1 TUNNEL 5P5 7040.120-2M		6720	44,8	149	7185	38,6	50
MX PRO 1 TUNNEL 5P5 7040.140-2M		7760	52,3	148	8299	45,4	50
MX PRO 1 TUNNEL 5P5 7040.180-2M		9670	67,7	142	10453	59,1	50
MX PRO 1 TUNNEL 5P5 7040.120-3M		10070	65,6	153	10777	57,9	50
MX PRO 1 TUNNEL 5P5 7040.140-3M		11600	76,7	151	12449	68	50
MX PRO 1 TUNNEL 5P5 7040.180-3M	AS-55M AS-55N AS-55W	14420	100	144	15680	88,7	50
MX PRO 1 TUNNEL 5P5 7040.140-4M		15260	102	149	16598	90,7	50
MX PRO 1 TUNNEL 5P5 7040.180-4M		18980	132	143	20906	118	50
MX PRO 1 TUNNEL 5P5 7040.100-1M		2800	19,1	146	3023	16	50
MX PRO 1 TUNNEL 5P5 7040.120-1M		3340	22,9	145	3592	19,3	50
MX PRO 1 TUNNEL 5P5 7040.140-1M		3860	26,8	144	4150	22,7	50
MX PRO 1 TUNNEL 5P5 7040.180-1M		4820	34,8	138	5227	29,6	50
MX PRO 1 TUNNEL 5P5 7040.100-2M		5590	37,4	149	6046	31,9	50
MX PRO 1 TUNNEL 5P5 7040.120-2M		6650	44,8	148	7185	38,6	50
MX PRO 1 TUNNEL 5P5 7040.140-2M		7670	52,3	146	8299	45,4	50
MX PRO 1 TUNNEL 5P5 7040.180-2M		9560	67,7	141	10453	59,1	50
MX PRO 1 TUNNEL 5P5 7040.120-3M	AS-65M AS-65N AS-65W	9950	65,6	151	10777	57,9	50
MX PRO 1 TUNNEL 5P5 7040.140-3M		11470	76,7	149	12449	68	50
MX PRO 1 TUNNEL 5P5 7040.180-3M		14260	100	142	15680	88,7	50
MX PRO 1 TUNNEL 5P5 7040.140-4M		15090	102	147	16598	90,7	50
MX PRO 1 TUNNEL 5P5 7040.180-4M		18760	132	142	20906	118	50
MX PRO 1 TUNNEL 5P5 7040.100-1M		2700	19,1	141	3023	16	50
MX PRO 1 TUNNEL 5P5 7040.120-1M		3220	22,9	140	3592	19,3	50
MX PRO 1 TUNNEL 5P5 7040.140-1M		3720	26,8	138	4150	22,7	50
MX PRO 1 TUNNEL 5P5 7040.180-1M		4640	34,8	133	5227	29,6	50
MX PRO 1 TUNNEL 5P5 7040.100-2M		5390	37,4	144	6046	31,9	50
MX PRO 1 TUNNEL 5P5 7040.120-2M		6420	44,8	143	7185	38,6	50
MX PRO 1 TUNNEL 5P5 7040.140-2M		7410	52,3	141	8299	45,4	50
MX PRO 1 TUNNEL 5P5 7040.180-2M		9230	67,7	136	10453	59,1	50

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
MX PRO 1 TUNNEL 5P5 7040.120-3M		9610	65,6	146	10777	57,9	50
MX PRO 1 TUNNEL 5P5 7040.140-3M		11070	76,7	144	12449	68	50
MX PRO 1 TUNNEL 5P5 7040.180-3M		13770	100	137	15680	88,7	50
MX PRO 1 TUNNEL 5P5 7040.140-4M		14570	102	142	16598	90,7	50
MX PRO 1 TUNNEL 5P5 7040.180-4M		18120	132	137	20906	118	50
MX PRO 1 TUNNEL 5P5 7040.060-2M		3460	23	150	3694	18,8	50
MX PRO 1 TUNNEL 5P5 7040.080-2M	TS-A	4560	30,1	151	4882	25,3	50
MX PRO 1 TUNNEL 5P5 7040.100-2M	TS-A1	5650	37,4	151	6046	31,9	50
MX PRO 1 TUNNEL 5P5 7040.120-2M	TS-US	6720	44,8	149	7185	38,6	50
MX PRO 1 TUNNEL 5P5 7040.140-2M	TS-05	7760	52,3	148	8299	45,4	50
MX PRO 1 TUNNEL 5P5 7040.180-2M	TS-07	9670	67,7	142	10453	59,1	50
MX PRO 1 TUNNEL 5P5 7040.140-4M	TS-ES	15260	102	149	16598	90,7	50
MX PRO 1 TUNNEL 5P5 7040.180-4M		18980	132	143	20906	118	50
MX PRO 1 TUNNEL 5P5 7040.060-2M		3540	23	153	3694	18,8	50
MX PRO 1 TUNNEL 5P5 7040.080-2M		4660	30,1	154	4882	25,3	50
MX PRO 1 TUNNEL 5P5 7040.100-2M	TS-V	5780	37,4	154	6046	31,9	50
MX PRO 1 TUNNEL 5P5 7040.120-2M	TS-UM	6880	44,8	153	7185	38,6	50
MX PRO 1 TUNNEL 5P5 7040.140-2M	TS-EM	7940	52,3	151	8299	45,4	50
MX PRO 1 TUNNEL 5P5 7040.180-2M	TS-W	9890	67,7	146	10453	59,1	50
MX PRO 1 TUNNEL 5P5 7040.140-4M		15610	102	153	16598	90,7	50
MX PRO 1 TUNNEL 5P5 7040.180-4M		19410	132	147	20906	118	50

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.