
FIRENZE
EVO

FIRENZE EVO

MAIN CHARACTERISTICS

Applications	Street and urban lighting.
Optic	SL05 - SL07: Asymmetrical optic for street, urban and green areas lighting. SLE-M - SLE-S: Asymmetrical optic for suburban street lighting. SLU-M - SLU-S: Asymmetrical optic for street, urban and cycle-path lighting. SLS: Symmetrical optic for street, urban and green areas lighting. Colour temperature: 4000K, 3000K, 2700K e 2200K (others on request) CRI ≥ 70. Optional Tunable White. LOR= 100%, DLOR= 100%, ULOR= 0% Photobiological safety class: EXEMPT GROUP. LED source efficiency: 174 lm/W @ 400mA, Tj=85°C, 4000K Transparent tempered flat glass. Optional flat satinised glass. Optional transparent side screens 3mm. Optional satin side screens 3mm. Optional side anti-emission screens.
Insulation class	II, I
Protection degree	IP66 IK09
Dimensions	390x390x734mm
Weight	max. 7.5 kg
Exposed surface	Side: 0.08m ² – Top: 0.15m ² SCx: 1.2m ²
Mounting	Pole top installation for female 1/2" GAS, 3/4" GAS, Ø60mm in option with adapter. S: Suspended installation for female 1/2" GAS, 3/4" GAS. Available in two lengths (80mm and 150mm) depending on the bracket provided.
Gear tray	Removable. Tool-free opening of wiring compartment. Integrated mains cable hide.
LED Modules	Removable.
Operating temp.	-40°C / +50°C
Storage temp	-40°C / +80°C
Main reference standards	EN 60598-1, EN 60598-2-3, EN 62471, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3



ELECTRICAL CHARACTERISTICS

Rated voltage	220+240V 50/60Hz (Standard tolerance +/-10%, other voltages and tolerances upon request)
Power factor	>0,9 (at full load, F, DA, DAC)
Mains connection	Terminal block for cables max section 4mm ² . Optional: on-load switch. Optional: cable H07RN-F nx1mm ² Optional: connector M/F IP66/68 for cables max. 2,5mm ² , Ø max. 12mm
Surge protection	Up to 12kV With SPD: CL.II: 10kV / 10kV CM/DM CL.I: 12kV / 10kV CM/DM. Without SPD: CL.II: 10kV / 6kV CM/DM CL.I: 10kV / 6kV CM/DM.
SPD (optional)	12kV-10kA, type 2+3, with LED signal and thermo fuse to disconnect load at the end of life.
Control system (options)	F: Fixed power not dimmable. DA: Automatic dimming (virtual midnight) with default profile. DAC: Custom DA profile. FLC: Constant light flux. DALI: Digital dimming interface DALI. ZHAGA(S): Socket 4 pin (ZHAGA Book 18) on the upper side. ZHAGA(I): Socket 4 pin (ZHAGA Book 18) on the underside (available on request after technical evaluation).
Optical unit lifetime (Tq=25°C)	>100.000hr L90B10 >100.000hr L90, TM-21

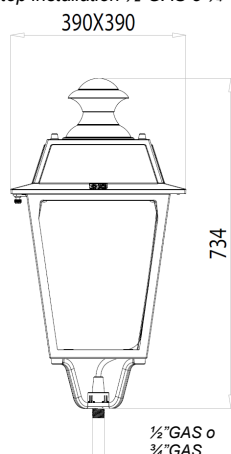
MATERIALS

Fixing	Four die-cast aluminum UNI EN1706 uprights powder painted. Steel fixing hub. Plastic hub cover. S: Painted steel tube.
Body	Die-cast aluminum UNI EN1706 powder painted.
Cover	
Optic	PMMA optics.
Screen	Flat tempered glass, thickness high transparency.
Gasket	Polyurethane without joints and transparent silicone printed.
Colour	Graphite - Cod. 01

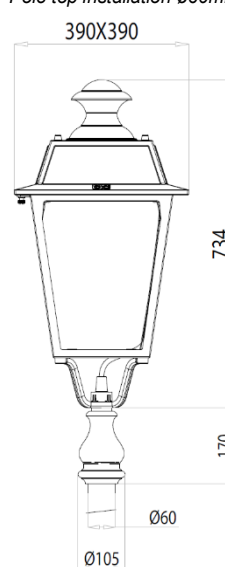
DIMENSIONAL DRAWINGS

FIRENZE EVO

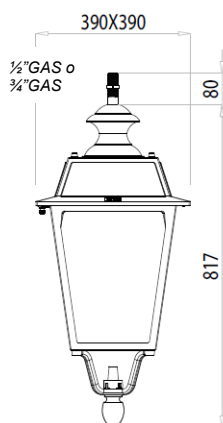
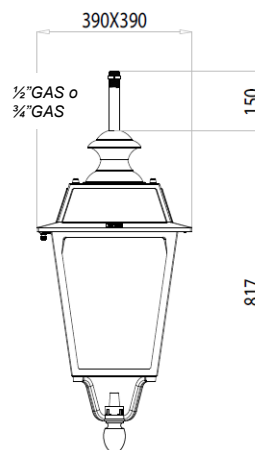
Pole top installation ½"GAS o ¾"GAS

**FIRENZE EVO**

Pole top installation ø60mm

**NOTE**

The 60 mm pole adapter must be ordered separately and can only be installed with the ½"GAS flow version.


FIRENZE EVO SSuspended installation ½"GAS o ¾"GAS
L=80mm fixing type**FIRENZE EVO S**Suspended installation ½"GAS o ¾"GAS
L=150mm fixing type
FIRENZE EVO S
COMPATIBILITY WITH CANDELABRA/BACKET AEC

FIRENZE EVO S (½"GAS)
L=80mm fixing type

BR15 bracket
BR16 bracket
BR19 bracket
Revelampe candelabra
Vasari candelabra with bracket series S
Vasari candelabra with bracket series M
Granducato candelabra

FIRENZE EVO S (½"GAS)
L=150mm fixing type

BR01 reversed bracket
BR02 bracket
BR03 reversed bracket
BR04 reversed bracket
BR05 reversed bracket
BR06 reversed bracket
BR07 reversed bracket
BR50 reversed bracket
BR51 reversed bracket



FIRENZE EVO 2AC4 4000K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7040.100-4M		1500	10,8	138	1735	8,3	50
FIRENZE EVO 2AC4 7040.110-4M		1650	11,8	139	1896	9,2	50
FIRENZE EVO 2AC4 7040.130-4M		1960	13,7	143	2216	11	50
FIRENZE EVO 2AC4 7040.150-4M		2250	15,7	143	2535	12,7	50
FIRENZE EVO 2AC4 7040.180-4M		2690	18,6	144	3009	15,4	50
FIRENZE EVO 2AC4 7040.210-4M		3130	21,4	146	3478	18,1	50
FIRENZE EVO 2AC4 7040.240-4M		3550	24,3	146	3943	20,9	50
FIRENZE EVO 2AC4 7040.290-4M		4240	29	146	4709	25,5	50
FIRENZE EVO 2AC4 7040.350-4M		5030	34,8	144	5612	31,1	50
FIRENZE EVO 2AC4 7040.390-4M		5540	38,8	142	6204	34,9	35
FIRENZE EVO 2AC4 7040.420-4M		5910	41,8	141	6643	37,8	35
FIRENZE EVO 2AC4 7040.450-4M		6270	45	139	7078	40,7	35
FIRENZE EVO 2AC4 7040.100-5M		1860	13,4	138	2169	10,4	50
FIRENZE EVO 2AC4 7040.110-5M		2050	14,4	142	2370	11,5	50
FIRENZE EVO 2AC4 7040.130-5M		2430	16,5	147	2770	13,7	50
FIRENZE EVO 2AC4 7040.150-5M		2800	18,7	149	3168	15,9	50
FIRENZE EVO 2AC4 7040.180-5M		3350	22,2	150	3761	19,3	50
FIRENZE EVO 2AC4 7040.210-5M		3890	25,8	150	4348	22,7	50
FIRENZE EVO 2AC4 7040.240-5M		4420	29,5	149	4929	26,1	50
FIRENZE EVO 2AC4 7040.290-5M		5270	35,9	146	5886	31,8	50
FIRENZE EVO 2AC4 7040.350-5M		6260	43,7	143	7015	38,9	50
FIRENZE EVO 2AC4 7040.390-5M		6890	48,8	141	7755	43,6	35
FIRENZE EVO 2AC4 7040.420-5M		7360	52,6	139	8304	47,2	35
FIRENZE EVO 2AC4 7040.450-5M		7810	56,2	138	8847	50,8	35
FIRENZE EVO 2AC4 7040.100-6M		2220	15,6	142	2603	12,5	50
FIRENZE EVO 2AC4 7040.110-6M		2450	16,9	144	2844	13,8	50
FIRENZE EVO 2AC4 7040.130-6M		2900	19,6	147	3325	16,5	50
FIRENZE EVO 2AC4 7040.150-6M		3350	22,3	150	3802	19,1	50
FIRENZE EVO 2AC4 7040.180-6M		4010	26,5	151	4513	23,1	50
FIRENZE EVO 2AC4 7040.210-6M		4650	30,8	150	5217	27,2	50
FIRENZE EVO 2AC4 7040.240-6M		5280	35,1	150	5915	31,3	50
FIRENZE EVO 2AC4 7040.290-6M		6300	42,5	148	7064	38,2	50
FIRENZE EVO 2AC4 7040.350-6M		7470	51,6	144	8418	46,6	50
FIRENZE EVO 2AC4 7040.390-6M		8220	57,7	142	9306	52,3	35
FIRENZE EVO 2AC4 7040.420-6M		8770	62,2	140	9964	56,6	35
FIRENZE EVO 2AC4 7040.450-6M		9300	66,8	139	10616	61	35
FIRENZE EVO 2AC4 7040.130-7M		3380	22,8	148	3879	19,2	50
FIRENZE EVO 2AC4 7040.150-7M		3900	26,2	148	4436	22,3	50
FIRENZE EVO 2AC4 7040.180-7M		4660	31,2	149	5265	27	50
FIRENZE EVO 2AC4 7040.210-7M		5410	36,2	149	6087	31,7	50
FIRENZE EVO 2AC4 7040.240-7M		6130	41,2	148	6901	36,5	50
FIRENZE EVO 2AC4 7040.290-7M		7300	49,6	147	8241	44,6	50
FIRENZE EVO 2AC4 7040.350-7M		8640	59,7	144	9821	54,4	35
FIRENZE EVO 2AC4 7040.400-7M		9700	68,3	142	11114	62,7	35
FIRENZE EVO 2AC4 7040.130-8M		3840	25,9	148	4433	21,9	50
FIRENZE EVO 2AC4 7040.150-8M		4430	29,6	149	5070	25,5	50
FIRENZE EVO 2AC4 7040.180-8M		5300	35,3	150	6017	30,9	50
FIRENZE EVO 2AC4 7040.210-8M		6140	40,9	150	6956	36,3	50
FIRENZE EVO 2AC4 7040.240-8M		6960	46,6	149	7887	41,7	50
FIRENZE EVO 2AC4 7040.290-8M		8280	56,1	147	9418	50,9	35
FIRENZE EVO 2AC4 7040.350-8M		9800	67,7	144	11224	62,2	35
FIRENZE EVO 2AC4 7040.130-9M		4310	29,1	148	4987	24,7	50
FIRENZE EVO 2AC4 7040.150-9M		4960	33,3	148	5703	28,7	50
FIRENZE EVO 2AC4 7040.180-9M		5930	39,5	150	6770	34,7	50
FIRENZE EVO 2AC4 7040.210-9M		6870	45,8	150	7826	40,8	50
FIRENZE EVO 2AC4 7040.240-9M		7790	52,1	149	8873	46,9	50
FIRENZE EVO 2AC4 7040.290-9M		9270	62,7	147	10595	57,3	35
FIRENZE EVO 2AC4 7040.350-9M		10960	75,6	144	12626	69,9	35
FIRENZE EVO 2AC4 7040.100-4M		1530	10,8	141	1735	8,3	50
FIRENZE EVO 2AC4 7040.110-4M		1690	11,8	143	1896	9,2	50
FIRENZE EVO 2AC4 7040.130-4M		2000	13,7	145	2216	11	50
FIRENZE EVO 2AC4 7040.150-4M		2300	15,7	146	2535	12,7	50
FIRENZE EVO 2AC4 7040.180-4M		2760	18,6	148	3009	15,4	50
FIRENZE EVO 2AC4 7040.210-4M		3200	21,4	149	3478	18,1	50
FIRENZE EVO 2AC4 7040.240-4M		3640	24,3	149	3943	20,9	50
FIRENZE EVO 2AC4 7040.290-4M		4340	29	149	4709	25,5	50
FIRENZE EVO 2AC4 7040.350-4M		5160	34,8	148	5612	31,1	50
FIRENZE EVO 2AC4 7040.390-4M		5680	38,8	146	6204	34,9	35
FIRENZE EVO 2AC4 7040.420-4M		6060	41,8	144	6643	37,8	35
FIRENZE EVO 2AC4 7040.450-4M		6430	45	142	7078	40,7	35

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7040.100-5M		1900	13,4	141	2169	10,4	50
FIRENZE EVO 2AC4 7040.110-5M		2100	14,4	145	2370	11,5	50
FIRENZE EVO 2AC4 7040.130-5M		2480	16,5	150	2770	13,7	50
FIRENZE EVO 2AC4 7040.150-5M		2860	18,7	152	3168	15,9	50
FIRENZE EVO 2AC4 7040.180-5M		3430	22,2	154	3761	19,3	50
FIRENZE EVO 2AC4 7040.210-5M		3980	25,8	154	4348	22,7	50
FIRENZE EVO 2AC4 7040.240-5M		4520	29,5	153	4929	26,1	50
FIRENZE EVO 2AC4 7040.290-5M		5400	35,9	150	5886	31,8	50
FIRENZE EVO 2AC4 7040.350-5M		6410	43,7	146	7015	38,9	50
FIRENZE EVO 2AC4 7040.390-5M		7060	48,8	144	7755	43,6	35
FIRENZE EVO 2AC4 7040.420-5M		7530	52,6	143	8304	47,2	35
FIRENZE EVO 2AC4 7040.450-5M		7990	56,2	142	8847	50,8	35
FIRENZE EVO 2AC4 7040.100-6M		2280	15,6	146	2603	12,5	50
FIRENZE EVO 2AC4 7040.110-6M		2510	16,9	148	2844	13,8	50
FIRENZE EVO 2AC4 7040.130-6M		2980	19,6	152	3325	16,5	50
FIRENZE EVO 2AC4 7040.150-6M		3440	22,3	154	3802	19,1	50
FIRENZE EVO 2AC4 7040.180-6M		4110	26,5	155	4513	23,1	50
FIRENZE EVO 2AC4 7040.210-6M		4770	30,8	154	5217	27,2	50
FIRENZE EVO 2AC4 7040.240-6M		5420	35,1	154	5915	31,3	50
FIRENZE EVO 2AC4 7040.290-6M		6460	42,5	152	7064	38,2	50
FIRENZE EVO 2AC4 7040.350-6M		7660	51,6	148	8418	46,6	50
FIRENZE EVO 2AC4 7040.390-6M		8430	57,7	146	9306	52,3	35
FIRENZE EVO 2AC4 7040.420-6M		8990	62,2	144	9964	56,6	35
FIRENZE EVO 2AC4 7040.450-6M		9530	66,8	142	10616	61	35
FIRENZE EVO 2AC4 7040.130-7M		3470	22,8	152	3879	19,2	50
FIRENZE EVO 2AC4 7040.150-7M		4000	26,2	152	4436	22,3	50
FIRENZE EVO 2AC4 7040.180-7M		4780	31,2	153	5265	27	50
FIRENZE EVO 2AC4 7040.210-7M		5540	36,2	153	6087	31,7	50
FIRENZE EVO 2AC4 7040.240-7M		6290	41,2	152	6901	36,5	50
FIRENZE EVO 2AC4 7040.290-7M		7480	49,6	150	8241	44,6	50
FIRENZE EVO 2AC4 7040.350-7M		8850	59,7	148	9821	54,4	35
FIRENZE EVO 2AC4 7040.400-7M		9940	68,3	145	11114	62,7	35
FIRENZE EVO 2AC4 7040.130-8M		3930	25,9	151	4433	21,9	50
FIRENZE EVO 2AC4 7040.150-8M		4540	29,6	153	5070	25,5	50
FIRENZE EVO 2AC4 7040.180-8M		5420	35,3	153	6017	30,9	50
FIRENZE EVO 2AC4 7040.210-8M		6290	40,9	153	6956	36,3	50
FIRENZE EVO 2AC4 7040.240-8M		7130	46,6	153	7887	41,7	50
FIRENZE EVO 2AC4 7040.290-8M		8490	56,1	151	9418	50,9	35
FIRENZE EVO 2AC4 7040.350-8M		10050	67,7	148	11224	62,2	35
FIRENZE EVO 2AC4 7040.130-9M		4410	29,1	151	4987	24,7	50
FIRENZE EVO 2AC4 7040.150-9M		5090	33,3	152	5703	28,7	50
FIRENZE EVO 2AC4 7040.180-9M		6080	39,5	153	6770	34,7	50
FIRENZE EVO 2AC4 7040.210-9M		7040	45,8	153	7826	40,8	50
FIRENZE EVO 2AC4 7040.240-9M		7980	52,1	153	8873	46,9	50
FIRENZE EVO 2AC4 7040.290-9M		9500	62,7	151	10595	57,3	35
FIRENZE EVO 2AC4 7040.350-9M		11230	75,6	148	12626	69,9	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

FIRENZE EVO 2AC4 3000K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(3000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(3000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7030.100-4M		1430	10,8	132	1666	8,3	50
FIRENZE EVO 2AC4 7030.110-4M		1570	11,8	133	1820	9,2	50
FIRENZE EVO 2AC4 7030.130-4M		1860	13,7	135	2128	11	50
FIRENZE EVO 2AC4 7030.150-4M		2140	15,7	136	2433	12,7	50
FIRENZE EVO 2AC4 7030.180-4M		2560	18,6	137	2888	15,4	50
FIRENZE EVO 2AC4 7030.210-4M		2970	21,4	138	3339	18,1	50
FIRENZE EVO 2AC4 7030.240-4M		3370	24,3	138	3786	20,9	50
FIRENZE EVO 2AC4 7030.290-4M		4030	29	138	4521	25,5	50
FIRENZE EVO 2AC4 7030.350-4M		4780	34,8	137	5387	31,1	50
FIRENZE EVO 2AC4 7030.390-4M		5260	38,8	135	5956	34,9	35
FIRENZE EVO 2AC4 7030.420-4M		5620	41,8	134	6377	37,8	35
FIRENZE EVO 2AC4 7030.180-5M		5960	45	132	6794	40,7	35
FIRENZE EVO 2AC4 7030.100-5M		1770	13,4	132	2082	10,4	50
FIRENZE EVO 2AC4 7030.110-5M		1950	14,4	135	2275	11,5	50
FIRENZE EVO 2AC4 7030.130-5M		2310	16,5	140	2660	13,7	50
FIRENZE EVO 2AC4 7030.150-5M		2660	18,7	142	3042	15,9	50
FIRENZE EVO 2AC4 7030.180-5M		3180	22,2	143	3610	19,3	50
FIRENZE EVO 2AC4 7030.210-5M		3690	25,8	143	4174	22,7	50
FIRENZE EVO 2AC4 7030.240-5M		4200	29,5	142	4732	26,1	50
FIRENZE EVO 2AC4 7030.290-5M		5010	35,9	139	5651	31,8	50
FIRENZE EVO 2AC4 7030.350-5M		5950	43,7	136	6734	38,9	50
FIRENZE EVO 2AC4 7030.390-5M		6550	48,8	134	7445	43,6	35
FIRENZE EVO 2AC4 7030.420-5M		6990	52,6	132	7971	47,2	35
FIRENZE EVO 2AC4 7030.450-5M		7420	56,2	132	8493	50,8	35
FIRENZE EVO 2AC4 7030.100-6M		2110	15,6	135	2499	12,5	50
FIRENZE EVO 2AC4 7030.110-6M		2330	16,9	137	2730	13,8	50
FIRENZE EVO 2AC4 7030.130-6M		2760	19,6	140	3192	16,5	50
FIRENZE EVO 2AC4 7030.150-6M	SL05	3180	22,3	142	3650	19,1	50
FIRENZE EVO 2AC4 7030.180-6M	SL07	3810	26,5	143	4332	23,1	50
FIRENZE EVO 2AC4 7030.210-6M	SLE-S	4420	30,8	143	5009	27,2	50
FIRENZE EVO 2AC4 7030.240-6M	SLU-M	5020	35,1	143	5678	31,3	50
FIRENZE EVO 2AC4 7030.290-6M	SLU-S	5990	42,5	140	6781	38,2	50
FIRENZE EVO 2AC4 7030.350-6M		7100	51,6	137	8081	46,6	50
FIRENZE EVO 2AC4 7030.390-6M		7810	57,7	135	8934	52,3	35
FIRENZE EVO 2AC4 7030.420-6M		8330	62,2	133	9566	56,6	35
FIRENZE EVO 2AC4 7030.450-6M		8830	66,8	132	10192	61	35
FIRENZE EVO 2AC4 7030.130-7M		3210	22,8	140	3724	19,2	50
FIRENZE EVO 2AC4 7030.150-7M		3710	26,2	141	4258	22,3	50
FIRENZE EVO 2AC4 7030.180-7M		4430	31,2	141	5055	27	50
FIRENZE EVO 2AC4 7030.210-7M		5140	36,2	141	5843	31,7	50
FIRENZE EVO 2AC4 7030.240-7M		5830	41,2	141	6625	36,5	50
FIRENZE EVO 2AC4 7030.290-7M		6940	49,6	139	7911	44,6	50
FIRENZE EVO 2AC4 7030.350-7M		8210	59,7	137	9428	54,4	35
FIRENZE EVO 2AC4 7030.400-7M		9220	68,3	134	10669	62,7	35
FIRENZE EVO 2AC4 7030.130-8M		3650	25,9	140	4255	21,9	50
FIRENZE EVO 2AC4 7030.150-8M		4210	29,6	142	4867	25,5	50
FIRENZE EVO 2AC4 7030.180-8M		5030	35,3	142	5777	30,9	50
FIRENZE EVO 2AC4 7030.210-8M		5830	40,9	142	6678	36,3	50
FIRENZE EVO 2AC4 7030.240-8M		6610	46,6	141	7571	41,7	50
FIRENZE EVO 2AC4 7030.290-8M		7870	56,1	140	9041	50,9	35
FIRENZE EVO 2AC4 7030.350-8M		9310	67,7	137	10775	62,2	35
FIRENZE EVO 2AC4 7030.130-9M		4090	29,1	140	4787	24,7	50
FIRENZE EVO 2AC4 7030.150-9M		4720	33,3	141	5475	28,7	50
FIRENZE EVO 2AC4 7030.180-9M		5630	39,5	142	6499	34,7	50
FIRENZE EVO 2AC4 7030.210-9M		6530	45,8	142	7513	40,8	50
FIRENZE EVO 2AC4 7030.240-9M		7400	52,1	142	8518	46,9	50
FIRENZE EVO 2AC4 7030.290-9M		8800	62,7	140	10171	57,3	35
FIRENZE EVO 2AC4 7030.350-9M		10410	75,6	137	12121	69,9	35
FIRENZE EVO 2AC4 7030.100-4M		1450	10,8	134	1666	8,3	50
FIRENZE EVO 2AC4 7030.110-4M		1600	11,8	135	1820	9,2	50
FIRENZE EVO 2AC4 7030.130-4M		1900	13,7	138	2128	11	50
FIRENZE EVO 2AC4 7030.150-4M		2190	15,7	139	2433	12,7	50
FIRENZE EVO 2AC4 7030.180-4M	SLE-M	2620	18,6	140	2888	15,4	50
FIRENZE EVO 2AC4 7030.210-4M	SLS	3040	21,4	142	3339	18,1	50
FIRENZE EVO 2AC4 7030.240-4M		3450	24,3	141	3786	20,9	50
FIRENZE EVO 2AC4 7030.290-4M		4130	29	142	4521	25,5	50
FIRENZE EVO 2AC4 7030.350-4M		4900	34,8	140	5387	31,1	50
FIRENZE EVO 2AC4 7030.390-4M		5400	38,8	139	5956	34,9	35
FIRENZE EVO 2AC4 7030.420-4M		5760	41,8	137	6377	37,8	35

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(3000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(3000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7030.450-4M		6110	45	135	6794	40,7	35
FIRENZE EVO 2AC4 7030.100-5M		1810	13,4	135	2082	10,4	50
FIRENZE EVO 2AC4 7030.110-5M		1990	14,4	138	2275	11,5	50
FIRENZE EVO 2AC4 7030.130-5M		2360	16,5	143	2660	13,7	50
FIRENZE EVO 2AC4 7030.150-5M		2720	18,7	145	3042	15,9	50
FIRENZE EVO 2AC4 7030.180-5M		3260	22,2	146	3610	19,3	50
FIRENZE EVO 2AC4 7030.210-5M		3780	25,8	146	4174	22,7	50
FIRENZE EVO 2AC4 7030.240-5M		4300	29,5	145	4732	26,1	50
FIRENZE EVO 2AC4 7030.290-5M		5130	35,9	142	5651	31,8	50
FIRENZE EVO 2AC4 7030.350-5M		6090	43,7	139	6734	38,9	50
FIRENZE EVO 2AC4 7030.390-5M		6710	48,8	137	7445	43,6	35
FIRENZE EVO 2AC4 7030.420-5M		7160	52,6	136	7971	47,2	35
FIRENZE EVO 2AC4 7030.450-5M		7590	56,2	135	8493	50,8	35
FIRENZE EVO 2AC4 7030.100-6M		2170	15,6	139	2499	12,5	50
FIRENZE EVO 2AC4 7030.110-6M		2390	16,9	141	2730	13,8	50
FIRENZE EVO 2AC4 7030.130-6M		2830	19,6	144	3192	16,5	50
FIRENZE EVO 2AC4 7030.150-6M		3270	22,3	146	3650	19,1	50
FIRENZE EVO 2AC4 7030.180-6M		3910	26,5	147	4332	23,1	50
FIRENZE EVO 2AC4 7030.210-6M		4530	30,8	147	5009	27,2	50
FIRENZE EVO 2AC4 7030.240-6M		5150	35,1	146	5678	31,3	50
FIRENZE EVO 2AC4 7030.290-6M		6140	42,5	144	6781	38,2	50
FIRENZE EVO 2AC4 7030.350-6M		7280	51,6	141	8081	46,6	50
FIRENZE EVO 2AC4 7030.390-6M		8010	57,7	138	8934	52,3	35
FIRENZE EVO 2AC4 7030.420-6M		8540	62,2	137	9566	56,6	35
FIRENZE EVO 2AC4 7030.450-6M		9060	66,8	135	10192	61	35
FIRENZE EVO 2AC4 7030.130-7M		3290	22,8	144	3724	19,2	50
FIRENZE EVO 2AC4 7030.150-7M		3800	26,2	145	4258	22,3	50
FIRENZE EVO 2AC4 7030.180-7M		4540	31,2	145	5055	27	50
FIRENZE EVO 2AC4 7030.210-7M		5270	36,2	145	5843	31,7	50
FIRENZE EVO 2AC4 7030.240-7M		5970	41,2	144	6625	36,5	50
FIRENZE EVO 2AC4 7030.290-7M		7110	49,6	143	7911	44,6	50
FIRENZE EVO 2AC4 7030.350-7M		8410	59,7	140	9428	54,4	35
FIRENZE EVO 2AC4 7030.400-7M		9440	68,3	138	10669	62,7	35
FIRENZE EVO 2AC4 7030.130-8M		3740	25,9	144	4255	21,9	50
FIRENZE EVO 2AC4 7030.150-8M		4310	29,6	145	4867	25,5	50
FIRENZE EVO 2AC4 7030.180-8M		5150	35,3	145	5777	30,9	50
FIRENZE EVO 2AC4 7030.210-8M		5970	40,9	145	6678	36,3	50
FIRENZE EVO 2AC4 7030.240-8M		6780	46,6	145	7571	41,7	50
FIRENZE EVO 2AC4 7030.290-8M		8070	56,1	143	9041	50,9	35
FIRENZE EVO 2AC4 7030.350-8M		9550	67,7	141	10775	62,2	35
FIRENZE EVO 2AC4 7030.130-9M		4190	29,1	143	4787	24,7	50
FIRENZE EVO 2AC4 7030.150-9M		4830	33,3	145	5475	28,7	50
FIRENZE EVO 2AC4 7030.180-9M		5770	39,5	146	6499	34,7	50
FIRENZE EVO 2AC4 7030.210-9M		6690	45,8	146	7513	40,8	50
FIRENZE EVO 2AC4 7030.240-9M		7580	52,1	145	8518	46,9	50
FIRENZE EVO 2AC4 7030.290-9M		9020	62,7	143	10171	57,3	35
FIRENZE EVO 2AC4 7030.350-9M		10670	75,6	141	12121	69,9	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

FIRENZE EVO 2AC4 2700K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2700K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2700K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7027.100-4M		1380	10,8	127	1614	8,3	50
FIRENZE EVO 2AC4 7027.110-4M		1520	11,8	128	1763	9,2	50
FIRENZE EVO 2AC4 7027.130-4M		1800	13,7	131	2061	11	50
FIRENZE EVO 2AC4 7027.150-4M		2070	15,7	131	2357	12,7	50
FIRENZE EVO 2AC4 7027.180-4M		2480	18,6	133	2798	15,4	50
FIRENZE EVO 2AC4 7027.210-4M		2880	21,4	134	3235	18,1	50
FIRENZE EVO 2AC4 7027.240-4M		3270	24,3	134	3667	20,9	50
FIRENZE EVO 2AC4 7027.290-4M		3900	29	134	4379	25,5	50
FIRENZE EVO 2AC4 7027.350-4M		4630	34,8	133	5219	31,1	50
FIRENZE EVO 2AC4 7027.390-4M		5100	38,8	131	5770	34,9	35
FIRENZE EVO 2AC4 7027.420-4M		5440	41,8	130	6178	37,8	35
FIRENZE EVO 2AC4 7027.450-4M		5770	45	128	6582	40,7	35
FIRENZE EVO 2AC4 7027.100-5M		1710	13,4	127	2017	10,4	50
FIRENZE EVO 2AC4 7027.110-5M		1890	14,4	131	2204	11,5	50
FIRENZE EVO 2AC4 7027.130-5M		2230	16,5	135	2577	13,7	50
FIRENZE EVO 2AC4 7027.150-5M		2580	18,7	137	2947	15,9	50
FIRENZE EVO 2AC4 7027.180-5M		3080	22,2	138	3498	19,3	50
FIRENZE EVO 2AC4 7027.210-5M		3580	25,8	138	4043	22,7	50
FIRENZE EVO 2AC4 7027.240-5M		4060	29,5	137	4584	26,1	50
FIRENZE EVO 2AC4 7027.290-5M		4850	35,9	135	5474	31,8	50
FIRENZE EVO 2AC4 7027.350-5M		5760	43,7	131	6524	38,9	50
FIRENZE EVO 2AC4 7027.390-5M		6340	48,8	129	7212	43,6	35
FIRENZE EVO 2AC4 7027.420-5M		6770	52,6	128	7722	47,2	35
FIRENZE EVO 2AC4 7027.450-5M		7180	56,2	127	8228	50,8	35
FIRENZE EVO 2AC4 7027.100-6M		2040	15,6	130	2421	12,5	50
FIRENZE EVO 2AC4 7027.110-6M		2250	16,9	133	2645	13,8	50
FIRENZE EVO 2AC4 7027.130-6M		2670	19,6	136	3092	16,5	50
FIRENZE EVO 2AC4 7027.150-6M	SL05	3080	22,3	138	3536	19,1	50
FIRENZE EVO 2AC4 7027.180-6M	SL07	3690	26,5	139	4197	23,1	50
FIRENZE EVO 2AC4 7027.210-6M	SLE-S	4280	30,8	138	4852	27,2	50
FIRENZE EVO 2AC4 7027.240-6M	SLU-M	4860	35,1	138	5501	31,3	50
FIRENZE EVO 2AC4 7027.290-6M	SLU-S	5800	42,5	136	6569	38,2	50
FIRENZE EVO 2AC4 7027.350-6M		6870	51,6	133	7828	46,6	50
FIRENZE EVO 2AC4 7027.390-6M		7560	57,7	131	8654	52,3	35
FIRENZE EVO 2AC4 7027.420-6M		8060	62,2	129	9267	56,6	35
FIRENZE EVO 2AC4 7027.450-6M		8560	66,8	128	9873	61	35
FIRENZE EVO 2AC4 7027.130-7M		3110	22,8	136	3607	19,2	50
FIRENZE EVO 2AC4 7027.150-7M		3590	26,2	137	4125	22,3	50
FIRENZE EVO 2AC4 7027.180-7M		4290	31,2	137	4897	27	50
FIRENZE EVO 2AC4 7027.210-7M		4970	36,2	137	5661	31,7	50
FIRENZE EVO 2AC4 7027.240-7M		5640	41,2	136	6418	36,5	50
FIRENZE EVO 2AC4 7027.290-7M		6720	49,6	135	7664	44,6	50
FIRENZE EVO 2AC4 7027.350-7M		7950	59,7	133	9133	54,4	35
FIRENZE EVO 2AC4 7027.400-7M		8930	68,3	130	10336	62,7	35
FIRENZE EVO 2AC4 7027.130-8M		3530	25,9	136	4123	21,9	50
FIRENZE EVO 2AC4 7027.150-8M		4080	29,6	137	4715	25,5	50
FIRENZE EVO 2AC4 7027.180-8M		4870	35,3	137	5596	30,9	50
FIRENZE EVO 2AC4 7027.210-8M		5650	40,9	138	6469	36,3	50
FIRENZE EVO 2AC4 7027.240-8M		6400	46,6	137	7335	41,7	50
FIRENZE EVO 2AC4 7027.290-8M		7620	56,1	135	8759	50,9	35
FIRENZE EVO 2AC4 7027.350-8M		9020	67,7	133	10438	62,2	35
FIRENZE EVO 2AC4 7027.130-9M		3960	29,1	136	4638	24,7	50
FIRENZE EVO 2AC4 7027.150-9M		4570	33,3	137	5304	28,7	50
FIRENZE EVO 2AC4 7027.180-9M		5450	39,5	137	6296	34,7	50
FIRENZE EVO 2AC4 7027.210-9M		6320	45,8	137	7278	40,8	50
FIRENZE EVO 2AC4 7027.240-9M		7170	52,1	137	8252	46,9	50
FIRENZE EVO 2AC4 7027.290-9M		8530	62,7	136	9854	57,3	35
FIRENZE EVO 2AC4 7027.350-9M		10080	75,6	133	11743	69,9	35
FIRENZE EVO 2AC4 7027.100-4M		1410	10,8	130	1614	8,3	50
FIRENZE EVO 2AC4 7027.110-4M		1550	11,8	131	1763	9,2	50
FIRENZE EVO 2AC4 7027.130-4M		1840	13,7	134	2061	11	50
FIRENZE EVO 2AC4 7027.150-4M		2120	15,7	135	2357	12,7	50
FIRENZE EVO 2AC4 7027.180-4M		2540	18,6	136	2798	15,4	50
FIRENZE EVO 2AC4 7027.210-4M	SLE-M	2940	21,4	137	3235	18,1	50
FIRENZE EVO 2AC4 7027.240-4M	SLS	3350	24,3	137	3667	20,9	50
FIRENZE EVO 2AC4 7027.290-4M		4000	29	137	4379	25,5	50
FIRENZE EVO 2AC4 7027.350-4M		4750	34,8	136	5219	31,1	50
FIRENZE EVO 2AC4 7027.390-4M		5230	38,8	134	5770	34,9	35
FIRENZE EVO 2AC4 7027.420-4M		5580	41,8	133	6178	37,8	35

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2700K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2700K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7027.450-4M		5920	45	131	6582	40,7	35
FIRENZE EVO 2AC4 7027.100-5M		1750	13,4	130	2017	10,4	50
FIRENZE EVO 2AC4 7027.110-5M		1930	14,4	134	2204	11,5	50
FIRENZE EVO 2AC4 7027.130-5M		2280	16,5	138	2577	13,7	50
FIRENZE EVO 2AC4 7027.150-5M		2640	18,7	141	2947	15,9	50
FIRENZE EVO 2AC4 7027.180-5M		3150	22,2	141	3498	19,3	50
FIRENZE EVO 2AC4 7027.210-5M		3660	25,8	141	4043	22,7	50
FIRENZE EVO 2AC4 7027.240-5M		4160	29,5	141	4584	26,1	50
FIRENZE EVO 2AC4 7027.290-5M		4970	35,9	138	5474	31,8	50
FIRENZE EVO 2AC4 7027.350-5M		5900	43,7	135	6524	38,9	50
FIRENZE EVO 2AC4 7027.390-5M		6490	48,8	132	7212	43,6	35
FIRENZE EVO 2AC4 7027.420-5M		6930	52,6	131	7722	47,2	35
FIRENZE EVO 2AC4 7027.450-5M		7360	56,2	130	8228	50,8	35
FIRENZE EVO 2AC4 7027.100-6M		2100	15,6	134	2421	12,5	50
FIRENZE EVO 2AC4 7027.110-6M		2310	16,9	136	2645	13,8	50
FIRENZE EVO 2AC4 7027.130-6M		2740	19,6	139	3092	16,5	50
FIRENZE EVO 2AC4 7027.150-6M		3160	22,3	141	3536	19,1	50
FIRENZE EVO 2AC4 7027.180-6M		3780	26,5	142	4197	23,1	50
FIRENZE EVO 2AC4 7027.210-6M		4390	30,8	142	4852	27,2	50
FIRENZE EVO 2AC4 7027.240-6M		4980	35,1	141	5501	31,3	50
FIRENZE EVO 2AC4 7027.290-6M		5940	42,5	139	6569	38,2	50
FIRENZE EVO 2AC4 7027.350-6M		7050	51,6	136	7828	46,6	50
FIRENZE EVO 2AC4 7027.390-6M		7750	57,7	134	8654	52,3	35
FIRENZE EVO 2AC4 7027.420-6M		8270	62,2	132	9267	56,6	35
FIRENZE EVO 2AC4 7027.450-6M		8770	66,8	131	9873	61	35
FIRENZE EVO 2AC4 7027.130-7M		3190	22,8	139	3607	19,2	50
FIRENZE EVO 2AC4 7027.150-7M		3680	26,2	140	4125	22,3	50
FIRENZE EVO 2AC4 7027.180-7M		4400	31,2	141	4897	27	50
FIRENZE EVO 2AC4 7027.210-7M		5100	36,2	140	5661	31,7	50
FIRENZE EVO 2AC4 7027.240-7M		5780	41,2	140	6418	36,5	50
FIRENZE EVO 2AC4 7027.290-7M		6880	49,6	138	7664	44,6	50
FIRENZE EVO 2AC4 7027.350-7M		8140	59,7	136	9133	54,4	35
FIRENZE EVO 2AC4 7027.400-7M		9140	68,3	133	10336	62,7	35
FIRENZE EVO 2AC4 7027.130-8M		3620	25,9	139	4123	21,9	50
FIRENZE EVO 2AC4 7027.150-8M		4170	29,6	140	4715	25,5	50
FIRENZE EVO 2AC4 7027.180-8M		4990	35,3	141	5596	30,9	50
FIRENZE EVO 2AC4 7027.210-8M		5790	40,9	141	6469	36,3	50
FIRENZE EVO 2AC4 7027.240-8M		6560	46,6	140	7335	41,7	50
FIRENZE EVO 2AC4 7027.290-8M		7810	56,1	139	8759	50,9	35
FIRENZE EVO 2AC4 7027.350-8M		9250	67,7	136	10438	62,2	35
FIRENZE EVO 2AC4 7027.130-9M		4060	29,1	139	4638	24,7	50
FIRENZE EVO 2AC4 7027.150-9M		4680	33,3	140	5304	28,7	50
FIRENZE EVO 2AC4 7027.180-9M		5590	39,5	141	6296	34,7	50
FIRENZE EVO 2AC4 7027.210-9M		6480	45,8	141	7278	40,8	50
FIRENZE EVO 2AC4 7027.240-9M		7340	52,1	140	8252	46,9	50
FIRENZE EVO 2AC4 7027.290-9M		8740	62,7	139	9854	57,3	35
FIRENZE EVO 2AC4 7027.350-9M		10330	75,6	136	11743	69,9	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

FIRENZE EVO 2AC4 2200K

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2200K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2200K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7022.100-4M	SL05 SL07 SLE-S SLU-M SLU-S	1260	10,8	116	1458	8,3	50
FIRENZE EVO 2AC4 7022.110-4M		1390	11,8	117	1593	9,2	50
FIRENZE EVO 2AC4 7022.130-4M		1640	13,7	119	1862	11	50
FIRENZE EVO 2AC4 7022.150-4M		1890	15,7	120	2129	12,7	50
FIRENZE EVO 2AC4 7022.180-4M		2260	18,6	121	2527	15,4	50
FIRENZE EVO 2AC4 7022.210-4M		2630	21,4	122	2922	18,1	50
FIRENZE EVO 2AC4 7022.240-4M		2980	24,3	122	3312	20,9	50
FIRENZE EVO 2AC4 7022.290-4M		3560	29	122	3956	25,5	50
FIRENZE EVO 2AC4 7022.350-4M		4230	34,8	121	4714	31,1	50
FIRENZE EVO 2AC4 7022.390-4M		4650	38,8	119	5211	34,9	35
FIRENZE EVO 2AC4 7022.420-4M		4970	41,8	118	5580	37,8	35
FIRENZE EVO 2AC4 7022.450-4M		5270	45	117	5945	40,7	35
FIRENZE EVO 2AC4 7022.100-5M		1560	13,4	116	1822	10,4	50
FIRENZE EVO 2AC4 7022.110-5M		1720	14,4	119	1991	11,5	50
FIRENZE EVO 2AC4 7022.130-5M		2040	16,5	123	2327	13,7	50
FIRENZE EVO 2AC4 7022.150-5M		2350	18,7	125	2661	15,9	50
FIRENZE EVO 2AC4 7022.180-5M		2810	22,2	126	3159	19,3	50
FIRENZE EVO 2AC4 7022.210-5M		3270	25,8	126	3652	22,7	50
FIRENZE EVO 2AC4 7022.240-5M		3710	29,5	125	4141	26,1	50
FIRENZE EVO 2AC4 7022.290-5M		4430	35,9	123	4944	31,8	50
FIRENZE EVO 2AC4 7022.350-5M		5260	43,7	120	5892	38,9	50
FIRENZE EVO 2AC4 7022.390-5M		5790	48,8	118	6514	43,6	35
FIRENZE EVO 2AC4 7022.420-5M		6180	52,6	117	6975	47,2	35
FIRENZE EVO 2AC4 7022.450-5M		6560	56,2	116	7431	50,8	35
FIRENZE EVO 2AC4 7022.100-6M		1860	15,6	119	2186	12,5	50
FIRENZE EVO 2AC4 7022.110-6M		2060	16,9	121	2389	13,8	50
FIRENZE EVO 2AC4 7022.130-6M		2440	19,6	124	2793	16,5	50
FIRENZE EVO 2AC4 7022.150-6M		2820	22,3	126	3194	19,1	50
FIRENZE EVO 2AC4 7022.180-6M		3370	26,5	127	3791	23,1	50
FIRENZE EVO 2AC4 7022.210-6M		3910	30,8	126	4383	27,2	50
FIRENZE EVO 2AC4 7022.240-6M		4440	35,1	126	4969	31,3	50
FIRENZE EVO 2AC4 7022.290-6M		5290	42,5	124	5933	38,2	50
FIRENZE EVO 2AC4 7022.350-6M		6270	51,6	121	7071	46,6	50
FIRENZE EVO 2AC4 7022.390-6M		6900	57,7	119	7817	52,3	35
FIRENZE EVO 2AC4 7022.420-6M		7360	62,2	118	8370	56,6	35
FIRENZE EVO 2AC4 7022.450-6M		7810	66,8	116	8918	61	35
FIRENZE EVO 2AC4 7022.130-7M		2840	22,8	124	3258	19,2	50
FIRENZE EVO 2AC4 7022.150-7M		3280	26,2	125	3726	22,3	50
FIRENZE EVO 2AC4 7022.180-7M		3920	31,2	125	4423	27	50
FIRENZE EVO 2AC4 7022.210-7M		4540	36,2	125	5113	31,7	50
FIRENZE EVO 2AC4 7022.240-7M		5150	41,2	124	5797	36,5	50
FIRENZE EVO 2AC4 7022.290-7M		6130	49,6	123	6922	44,6	50
FIRENZE EVO 2AC4 7022.350-7M		7260	59,7	121	8249	54,4	35
FIRENZE EVO 2AC4 7022.400-7M		8150	68,3	119	9336	62,7	35
FIRENZE EVO 2AC4 7022.130-8M		3230	25,9	124	3724	21,9	50
FIRENZE EVO 2AC4 7022.150-8M		3720	29,6	125	4258	25,5	50
FIRENZE EVO 2AC4 7022.180-8M		4450	35,3	126	5055	30,9	50
FIRENZE EVO 2AC4 7022.210-8M		5160	40,9	126	5843	36,3	50
FIRENZE EVO 2AC4 7022.240-8M		5850	46,6	125	6625	41,7	50
FIRENZE EVO 2AC4 7022.290-8M		6960	56,1	124	7911	50,9	35
FIRENZE EVO 2AC4 7022.350-8M		8230	67,7	121	9428	62,2	35
FIRENZE EVO 2AC4 7022.130-9M		3620	29,1	124	4189	24,7	50
FIRENZE EVO 2AC4 7022.150-9M		4170	33,3	125	4791	28,7	50
FIRENZE EVO 2AC4 7022.180-9M		4980	39,5	126	5686	34,7	50
FIRENZE EVO 2AC4 7022.210-9M		5770	45,8	125	6574	40,8	50
FIRENZE EVO 2AC4 7022.240-9M		6540	52,1	125	7453	46,9	50
FIRENZE EVO 2AC4 7022.290-9M		7790	62,7	124	8900	57,3	35
FIRENZE EVO 2AC4 7022.350-9M		9210	75,6	121	10606	69,9	35
FIRENZE EVO 2AC4 7022.100-4M	SLE-M SLS	1290	10,8	119	1458	8,3	50
FIRENZE EVO 2AC4 7022.110-4M		1420	11,8	120	1593	9,2	50
FIRENZE EVO 2AC4 7022.130-4M		1680	13,7	122	1862	11	50
FIRENZE EVO 2AC4 7022.150-4M		1930	15,7	122	2129	12,7	50
FIRENZE EVO 2AC4 7022.180-4M		2310	18,6	124	2527	15,4	50
FIRENZE EVO 2AC4 7022.210-4M		2690	21,4	125	2922	18,1	50
FIRENZE EVO 2AC4 7022.240-4M		3050	24,3	125	3312	20,9	50
FIRENZE EVO 2AC4 7022.290-4M		3650	29	125	3956	25,5	50
FIRENZE EVO 2AC4 7022.350-4M		4330	34,8	124	4714	31,1	50
FIRENZE EVO 2AC4 7022.390-4M		4770	38,8	122	5211	34,9	35
FIRENZE EVO 2AC4 7022.420-4M		5090	41,8	121	5580	37,8	35

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2200K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2200K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7022.450-4M		5410	45	120	5945	40,7	35
FIRENZE EVO 2AC4 7022.100-5M		1600	13,4	119	1822	10,4	50
FIRENZE EVO 2AC4 7022.110-5M		1760	14,4	122	1991	11,5	50
FIRENZE EVO 2AC4 7022.130-5M		2090	16,5	126	2327	13,7	50
FIRENZE EVO 2AC4 7022.150-5M		2410	18,7	128	2661	15,9	50
FIRENZE EVO 2AC4 7022.180-5M		2880	22,2	129	3159	19,3	50
FIRENZE EVO 2AC4 7022.210-5M		3340	25,8	129	3652	22,7	50
FIRENZE EVO 2AC4 7022.240-5M		3800	29,5	128	4141	26,1	50
FIRENZE EVO 2AC4 7022.290-5M		4540	35,9	126	4944	31,8	50
FIRENZE EVO 2AC4 7022.350-5M		5380	43,7	123	5892	38,9	50
FIRENZE EVO 2AC4 7022.390-5M		5930	48,8	121	6514	43,6	35
FIRENZE EVO 2AC4 7022.420-5M		6330	52,6	120	6975	47,2	35
FIRENZE EVO 2AC4 7022.450-5M		6720	56,2	119	7431	50,8	35
FIRENZE EVO 2AC4 7022.100-6M		1920	15,6	123	2186	12,5	50
FIRENZE EVO 2AC4 7022.110-6M		2110	16,9	124	2389	13,8	50
FIRENZE EVO 2AC4 7022.130-6M		2500	19,6	127	2793	16,5	50
FIRENZE EVO 2AC4 7022.150-6M		2890	22,3	129	3194	19,1	50
FIRENZE EVO 2AC4 7022.180-6M		3450	26,5	130	3791	23,1	50
FIRENZE EVO 2AC4 7022.210-6M		4010	30,8	130	4383	27,2	50
FIRENZE EVO 2AC4 7022.240-6M		4550	35,1	129	4969	31,3	50
FIRENZE EVO 2AC4 7022.290-6M		5430	42,5	127	5933	38,2	50
FIRENZE EVO 2AC4 7022.350-6M		6430	51,6	124	7071	46,6	50
FIRENZE EVO 2AC4 7022.390-6M		7080	57,7	122	7817	52,3	35
FIRENZE EVO 2AC4 7022.420-6M		7550	62,2	121	8370	56,6	35
FIRENZE EVO 2AC4 7022.450-6M		8010	66,8	119	8918	61	35
FIRENZE EVO 2AC4 7022.130-7M		2910	22,8	127	3258	19,2	50
FIRENZE EVO 2AC4 7022.150-7M		3360	26,2	128	3726	22,3	50
FIRENZE EVO 2AC4 7022.180-7M		4020	31,2	128	4423	27	50
FIRENZE EVO 2AC4 7022.210-7M		4660	36,2	128	5113	31,7	50
FIRENZE EVO 2AC4 7022.240-7M		5280	41,2	128	5797	36,5	50
FIRENZE EVO 2AC4 7022.290-7M		6280	49,6	126	6922	44,6	50
FIRENZE EVO 2AC4 7022.350-7M		7430	59,7	124	8249	54,4	35
FIRENZE EVO 2AC4 7022.400-7M		8350	68,3	122	9336	62,7	35
FIRENZE EVO 2AC4 7022.130-8M		3300	25,9	127	3724	21,9	50
FIRENZE EVO 2AC4 7022.150-8M		3810	29,6	128	4258	25,5	50
FIRENZE EVO 2AC4 7022.180-8M		4560	35,3	129	5055	30,9	50
FIRENZE EVO 2AC4 7022.210-8M		5280	40,9	129	5843	36,3	50
FIRENZE EVO 2AC4 7022.240-8M		5990	46,6	128	6625	41,7	50
FIRENZE EVO 2AC4 7022.290-8M		7130	56,1	127	7911	50,9	35
FIRENZE EVO 2AC4 7022.350-8M		8440	67,7	124	9428	62,2	35
FIRENZE EVO 2AC4 7022.130-9M		3710	29,1	127	4189	24,7	50
FIRENZE EVO 2AC4 7022.150-9M		4270	33,3	128	4791	28,7	50
FIRENZE EVO 2AC4 7022.180-9M		5100	39,5	129	5686	34,7	50
FIRENZE EVO 2AC4 7022.210-9M		5910	45,8	129	6574	40,8	50
FIRENZE EVO 2AC4 7022.240-9M		6700	52,1	128	7453	46,9	50
FIRENZE EVO 2AC4 7022.290-9M		7980	62,7	127	8900	57,3	35
FIRENZE EVO 2AC4 7022.350-9M		9430	75,6	124	10606	69,9	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

FIRENZE EVO 2AC4 4000K SAT

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7040.100-4M SAT	SL05 SL07 SLE-S SLU-M SLU-S	1370	10,8	126	1735	8,3	50
FIRENZE EVO 2AC4 7040.110-4M SAT		1500	11,8	127	1896	9,2	50
FIRENZE EVO 2AC4 7040.130-4M SAT		1780	13,7	129	2216	11	50
FIRENZE EVO 2AC4 7040.150-4M SAT		2050	15,7	130	2535	12,7	50
FIRENZE EVO 2AC4 7040.180-4M SAT		2450	18,6	131	3009	15,4	50
FIRENZE EVO 2AC4 7040.210-4M SAT		2850	21,4	133	3478	18,1	50
FIRENZE EVO 2AC4 7040.240-4M SAT		3230	24,3	132	3943	20,9	50
FIRENZE EVO 2AC4 7040.290-4M SAT		3860	29	133	4709	25,5	50
FIRENZE EVO 2AC4 7040.350-4M SAT		4580	34,8	131	5612	31,1	50
FIRENZE EVO 2AC4 7040.390-4M SAT		5040	38,8	129	6204	34,9	35
FIRENZE EVO 2AC4 7040.420-4M SAT		5380	41,8	128	6643	37,8	35
FIRENZE EVO 2AC4 7040.450-4M SAT		5710	45	126	7078	40,7	35
FIRENZE EVO 2AC4 7040.100-5M SAT		1690	13,4	126	2169	10,4	50
FIRENZE EVO 2AC4 7040.110-5M SAT		1870	14,4	129	2370	11,5	50
FIRENZE EVO 2AC4 7040.130-5M SAT		2210	16,5	133	2770	13,7	50
FIRENZE EVO 2AC4 7040.150-5M SAT		2550	18,7	136	3168	15,9	50
FIRENZE EVO 2AC4 7040.180-5M SAT		3050	22,2	137	3761	19,3	50
FIRENZE EVO 2AC4 7040.210-5M SAT		3540	25,8	137	4348	22,7	50
FIRENZE EVO 2AC4 7040.240-5M SAT		4020	29,5	136	4929	26,1	50
FIRENZE EVO 2AC4 7040.290-5M SAT		4800	35,9	133	5886	31,8	50
FIRENZE EVO 2AC4 7040.350-5M SAT		5700	43,7	130	7015	38,9	50
FIRENZE EVO 2AC4 7040.390-5M SAT		6270	48,8	128	7755	43,6	35
FIRENZE EVO 2AC4 7040.420-5M SAT		6690	52,6	127	8304	47,2	35
FIRENZE EVO 2AC4 7040.450-5M SAT		7100	56,2	126	8847	50,8	35
FIRENZE EVO 2AC4 7040.100-6M SAT		2020	15,6	129	2603	12,5	50
FIRENZE EVO 2AC4 7040.110-6M SAT		2230	16,9	131	2844	13,8	50
FIRENZE EVO 2AC4 7040.130-6M SAT		2640	19,6	134	3325	16,5	50
FIRENZE EVO 2AC4 7040.150-6M SAT		3050	22,3	136	3802	19,1	50
FIRENZE EVO 2AC4 7040.180-6M SAT		3650	26,5	137	4513	23,1	50
FIRENZE EVO 2AC4 7040.210-6M SAT		4240	30,8	137	5217	27,2	50
FIRENZE EVO 2AC4 7040.240-6M SAT		4810	35,1	137	5915	31,3	50
FIRENZE EVO 2AC4 7040.290-6M SAT		5730	42,5	134	7064	38,2	50
FIRENZE EVO 2AC4 7040.350-6M SAT		6800	51,6	131	8418	46,6	50
FIRENZE EVO 2AC4 7040.390-6M SAT		7480	57,7	129	9306	52,3	35
FIRENZE EVO 2AC4 7040.420-6M SAT		7980	62,2	128	9964	56,6	35
FIRENZE EVO 2AC4 7040.450-6M SAT		8460	66,8	126	10616	61	35
FIRENZE EVO 2AC4 7040.130-7M SAT		3080	22,8	135	3879	19,2	50
FIRENZE EVO 2AC4 7040.150-7M SAT		3550	26,2	135	4436	22,3	50
FIRENZE EVO 2AC4 7040.180-7M SAT		4240	31,2	135	5265	27	50
FIRENZE EVO 2AC4 7040.210-7M SAT		4920	36,2	135	6087	31,7	50
FIRENZE EVO 2AC4 7040.240-7M SAT		5580	41,2	135	6901	36,5	50
FIRENZE EVO 2AC4 7040.290-7M SAT		6640	49,6	133	8241	44,6	50
FIRENZE EVO 2AC4 7040.350-7M SAT		7860	59,7	131	9821	54,4	35
FIRENZE EVO 2AC4 7040.400-7M SAT		8830	68,3	129	11114	62,7	35
FIRENZE EVO 2AC4 7040.130-8M SAT		3500	25,9	135	4433	21,9	50
FIRENZE EVO 2AC4 7040.150-8M SAT		4030	29,6	136	5070	25,5	50
FIRENZE EVO 2AC4 7040.180-8M SAT		4820	35,3	136	6017	30,9	50
FIRENZE EVO 2AC4 7040.210-8M SAT		5590	40,9	136	6956	36,3	50
FIRENZE EVO 2AC4 7040.240-8M SAT		6330	46,6	135	7887	41,7	50
FIRENZE EVO 2AC4 7040.290-8M SAT		7540	56,1	134	9418	50,9	35
FIRENZE EVO 2AC4 7040.350-8M SAT		8920	67,7	131	11224	62,2	35
FIRENZE EVO 2AC4 7040.130-9M SAT		3920	29,1	134	4987	24,7	50
FIRENZE EVO 2AC4 7040.150-9M SAT		4520	33,3	135	5703	28,7	50
FIRENZE EVO 2AC4 7040.180-9M SAT		5400	39,5	136	6770	34,7	50
FIRENZE EVO 2AC4 7040.210-9M SAT		6250	45,8	136	7826	40,8	50
FIRENZE EVO 2AC4 7040.240-9M SAT		7090	52,1	136	8873	46,9	50
FIRENZE EVO 2AC4 7040.290-9M SAT		8430	62,7	134	10595	57,3	35
FIRENZE EVO 2AC4 7040.350-9M SAT		9970	75,6	131	12626	69,9	35
FIRENZE EVO 2AC4 7040.100-4M SAT	SLE-M SLS	1390	10,8	128	1735	8,3	50
FIRENZE EVO 2AC4 7040.110-4M SAT		1530	11,8	129	1896	9,2	50
FIRENZE EVO 2AC4 7040.130-4M SAT		1820	13,7	132	2216	11	50
FIRENZE EVO 2AC4 7040.150-4M SAT		2100	15,7	133	2535	12,7	50
FIRENZE EVO 2AC4 7040.180-4M SAT		2510	18,6	134	3009	15,4	50
FIRENZE EVO 2AC4 7040.210-4M SAT		2910	21,4	135	3478	18,1	50
FIRENZE EVO 2AC4 7040.240-4M SAT		3310	24,3	136	3943	20,9	50
FIRENZE EVO 2AC4 7040.290-4M SAT		3950	29	136	4709	25,5	50
FIRENZE EVO 2AC4 7040.350-4M SAT		4700	34,8	135	5612	31,1	50
FIRENZE EVO 2AC4 7040.390-4M SAT		5170	38,8	133	6204	34,9	35
FIRENZE EVO 2AC4 7040.420-4M SAT		5520	41,8	132	6643	37,8	35
FIRENZE EVO 2AC4 7040.450-4M SAT		5860	45	130	7078	40,7	35

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(4000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(4000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7040.100-5M SAT		1730	13,4	129	2169	10,4	50
FIRENZE EVO 2AC4 7040.110-5M SAT		1910	14,4	132	2370	11,5	50
FIRENZE EVO 2AC4 7040.130-5M SAT		2260	16,5	136	2770	13,7	50
FIRENZE EVO 2AC4 7040.150-5M SAT		2610	18,7	139	3168	15,9	50
FIRENZE EVO 2AC4 7040.180-5M SAT		3120	22,2	140	3761	19,3	50
FIRENZE EVO 2AC4 7040.210-5M SAT		3620	25,8	140	4348	22,7	50
FIRENZE EVO 2AC4 7040.240-5M SAT		4120	29,5	139	4929	26,1	50
FIRENZE EVO 2AC4 7040.290-5M SAT		4910	35,9	136	5886	31,8	50
FIRENZE EVO 2AC4 7040.350-5M SAT		5830	43,7	133	7015	38,9	50
FIRENZE EVO 2AC4 7040.390-5M SAT		6420	48,8	131	7755	43,6	35
FIRENZE EVO 2AC4 7040.420-5M SAT		6850	52,6	130	8304	47,2	35
FIRENZE EVO 2AC4 7040.450-5M SAT		7280	56,2	129	8847	50,8	35
FIRENZE EVO 2AC4 7040.100-6M SAT		2070	15,6	132	2603	12,5	50
FIRENZE EVO 2AC4 7040.110-6M SAT		2290	16,9	135	2844	13,8	50
FIRENZE EVO 2AC4 7040.130-6M SAT		2710	19,6	138	3325	16,5	50
FIRENZE EVO 2AC4 7040.150-6M SAT		3130	22,3	140	3802	19,1	50
FIRENZE EVO 2AC4 7040.180-6M SAT		3740	26,5	141	4513	23,1	50
FIRENZE EVO 2AC4 7040.210-6M SAT		4340	30,8	140	5217	27,2	50
FIRENZE EVO 2AC4 7040.240-6M SAT		4930	35,1	140	5915	31,3	50
FIRENZE EVO 2AC4 7040.290-6M SAT		5880	42,5	138	7064	38,2	50
FIRENZE EVO 2AC4 7040.350-6M SAT		6970	51,6	135	8418	46,6	50
FIRENZE EVO 2AC4 7040.390-6M SAT		7670	57,7	132	9306	52,3	35
FIRENZE EVO 2AC4 7040.420-6M SAT		8180	62,2	131	9964	56,6	35
FIRENZE EVO 2AC4 7040.450-6M SAT		8670	66,8	129	10616	61	35
FIRENZE EVO 2AC4 7040.130-7M SAT		3160	22,8	138	3879	19,2	50
FIRENZE EVO 2AC4 7040.150-7M SAT		3640	26,2	138	4436	22,3	50
FIRENZE EVO 2AC4 7040.180-7M SAT		4350	31,2	139	5265	27	50
FIRENZE EVO 2AC4 7040.210-7M SAT		5050	36,2	139	6087	31,7	50
FIRENZE EVO 2AC4 7040.240-7M SAT		5720	41,2	138	6901	36,5	50
FIRENZE EVO 2AC4 7040.290-7M SAT		6810	49,6	137	8241	44,6	50
FIRENZE EVO 2AC4 7040.350-7M SAT		8050	59,7	134	9821	54,4	35
FIRENZE EVO 2AC4 7040.400-7M SAT		9040	68,3	132	11114	62,7	35
FIRENZE EVO 2AC4 7040.130-8M SAT		3580	25,9	138	4433	21,9	50
FIRENZE EVO 2AC4 7040.150-8M SAT		4130	29,6	139	5070	25,5	50
FIRENZE EVO 2AC4 7040.180-8M SAT		4940	35,3	139	6017	30,9	50
FIRENZE EVO 2AC4 7040.210-8M SAT		5720	40,9	139	6956	36,3	50
FIRENZE EVO 2AC4 7040.240-8M SAT		6490	46,6	139	7887	41,7	50
FIRENZE EVO 2AC4 7040.290-8M SAT		7730	56,1	137	9418	50,9	35
FIRENZE EVO 2AC4 7040.350-8M SAT		9150	67,7	135	11224	62,2	35
FIRENZE EVO 2AC4 7040.130-9M SAT		4020	29,1	138	4987	24,7	50
FIRENZE EVO 2AC4 7040.150-9M SAT		4630	33,3	139	5703	28,7	50
FIRENZE EVO 2AC4 7040.180-9M SAT		5530	39,5	140	6770	34,7	50
FIRENZE EVO 2AC4 7040.210-9M SAT		6410	45,8	139	7826	40,8	50
FIRENZE EVO 2AC4 7040.240-9M SAT		7260	52,1	139	8873	46,9	50
FIRENZE EVO 2AC4 7040.290-9M SAT		8640	62,7	137	10595	57,3	35
FIRENZE EVO 2AC4 7040.350-9M SAT		10220	75,6	135	12626	69,9	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

FIRENZE EVO 2AC4 3000K SAT

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(3000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(3000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7030.100-4M SAT	SL05 SL07 SLE-S SLU-M SLU-S	1290	10,8	119	1666	8,3	50
FIRENZE EVO 2AC4 7030.110-4M SAT		1420	11,8	120	1820	9,2	50
FIRENZE EVO 2AC4 7030.130-4M SAT		1680	13,7	122	2128	11	50
FIRENZE EVO 2AC4 7030.150-4M SAT		1940	15,7	123	2433	12,7	50
FIRENZE EVO 2AC4 7030.180-4M SAT		2320	18,6	124	2888	15,4	50
FIRENZE EVO 2AC4 7030.210-4M SAT		2690	21,4	125	3339	18,1	50
FIRENZE EVO 2AC4 7030.240-4M SAT		3050	24,3	125	3786	20,9	50
FIRENZE EVO 2AC4 7030.290-4M SAT		3640	29	125	4521	25,5	50
FIRENZE EVO 2AC4 7030.350-4M SAT		4330	34,8	124	5387	31,1	50
FIRENZE EVO 2AC4 7030.390-4M SAT		4760	38,8	122	5956	34,9	35
FIRENZE EVO 2AC4 7030.420-4M SAT		5080	41,8	121	6377	37,8	35
FIRENZE EVO 2AC4 7030.450-4M SAT		5400	45	120	6794	40,7	35
FIRENZE EVO 2AC4 7030.100-5M SAT		1600	13,4	119	2082	10,4	50
FIRENZE EVO 2AC4 7030.110-5M SAT		1760	14,4	122	2275	11,5	50
FIRENZE EVO 2AC4 7030.130-5M SAT		2090	16,5	126	2660	13,7	50
FIRENZE EVO 2AC4 7030.150-5M SAT		2410	18,7	128	3042	15,9	50
FIRENZE EVO 2AC4 7030.180-5M SAT		2880	22,2	129	3610	19,3	50
FIRENZE EVO 2AC4 7030.210-5M SAT		3340	25,8	129	4174	22,7	50
FIRENZE EVO 2AC4 7030.240-5M SAT		3800	29,5	128	4732	26,1	50
FIRENZE EVO 2AC4 7030.290-5M SAT		4530	35,9	126	5651	31,8	50
FIRENZE EVO 2AC4 7030.350-5M SAT		5380	43,7	123	6734	38,9	50
FIRENZE EVO 2AC4 7030.390-5M SAT		5930	48,8	121	7445	43,6	35
FIRENZE EVO 2AC4 7030.420-5M SAT		6330	52,6	120	7971	47,2	35
FIRENZE EVO 2AC4 7030.450-5M SAT		6710	56,2	119	8493	50,8	35
FIRENZE EVO 2AC4 7030.100-6M SAT		1910	15,6	122	2499	12,5	50
FIRENZE EVO 2AC4 7030.110-6M SAT		2110	16,9	124	2730	13,8	50
FIRENZE EVO 2AC4 7030.130-6M SAT		2500	19,6	127	3192	16,5	50
FIRENZE EVO 2AC4 7030.150-6M SAT		2880	22,3	129	3650	19,1	50
FIRENZE EVO 2AC4 7030.180-6M SAT		3450	26,5	130	4332	23,1	50
FIRENZE EVO 2AC4 7030.210-6M SAT		4000	30,8	129	5009	27,2	50
FIRENZE EVO 2AC4 7030.240-6M SAT		4540	35,1	129	5678	31,3	50
FIRENZE EVO 2AC4 7030.290-6M SAT		5420	42,5	127	6781	38,2	50
FIRENZE EVO 2AC4 7030.350-6M SAT		6420	51,6	124	8081	46,6	50
FIRENZE EVO 2AC4 7030.390-6M SAT		7070	57,7	122	8934	52,3	35
FIRENZE EVO 2AC4 7030.420-6M SAT		7540	62,2	121	9566	56,6	35
FIRENZE EVO 2AC4 7030.450-6M SAT		8000	66,8	119	10192	61	35
FIRENZE EVO 2AC4 7030.130-7M SAT		2910	22,8	127	3724	19,2	50
FIRENZE EVO 2AC4 7030.150-7M SAT		3360	26,2	128	4258	22,3	50
FIRENZE EVO 2AC4 7030.180-7M SAT		4010	31,2	128	5055	27	50
FIRENZE EVO 2AC4 7030.210-7M SAT		4650	36,2	128	5843	31,7	50
FIRENZE EVO 2AC4 7030.240-7M SAT		5270	41,2	127	6625	36,5	50
FIRENZE EVO 2AC4 7030.290-7M SAT		6280	49,6	126	7911	44,6	50
FIRENZE EVO 2AC4 7030.350-7M SAT		7430	59,7	124	9428	54,4	35
FIRENZE EVO 2AC4 7030.400-7M SAT		8340	68,3	122	10669	62,7	35
FIRENZE EVO 2AC4 7030.130-8M SAT		3300	25,9	127	4255	21,9	50
FIRENZE EVO 2AC4 7030.150-8M SAT		3810	29,6	128	4867	25,5	50
FIRENZE EVO 2AC4 7030.180-8M SAT		4550	35,3	128	5777	30,9	50
FIRENZE EVO 2AC4 7030.210-8M SAT		5280	40,9	129	6678	36,3	50
FIRENZE EVO 2AC4 7030.240-8M SAT		5990	46,6	128	7571	41,7	50
FIRENZE EVO 2AC4 7030.290-8M SAT		7120	56,1	126	9041	50,9	35
FIRENZE EVO 2AC4 7030.350-8M SAT		8430	67,7	124	10775	62,2	35
FIRENZE EVO 2AC4 7030.130-9M SAT		3700	29,1	127	4787	24,7	50
FIRENZE EVO 2AC4 7030.150-9M SAT		4270	33,3	128	5475	28,7	50
FIRENZE EVO 2AC4 7030.180-9M SAT		5100	39,5	129	6499	34,7	50
FIRENZE EVO 2AC4 7030.210-9M SAT		5910	45,8	129	7513	40,8	50
FIRENZE EVO 2AC4 7030.240-9M SAT		6700	52,1	128	8518	46,9	50
FIRENZE EVO 2AC4 7030.290-9M SAT		7970	62,7	127	10171	57,3	35
FIRENZE EVO 2AC4 7030.350-9M SAT		9430	75,6	124	12121	69,9	35
FIRENZE EVO 2AC4 7030.100-4M SAT	SLE-M SLS	1320	10,8	122	1666	8,3	50
FIRENZE EVO 2AC4 7030.110-4M SAT		1450	11,8	122	1820	9,2	50
FIRENZE EVO 2AC4 7030.130-4M SAT		1720	13,7	125	2128	11	50
FIRENZE EVO 2AC4 7030.150-4M SAT		1980	15,7	126	2433	12,7	50
FIRENZE EVO 2AC4 7030.180-4M SAT		2370	18,6	127	2888	15,4	50
FIRENZE EVO 2AC4 7030.210-4M SAT		2750	21,4	128	3339	18,1	50
FIRENZE EVO 2AC4 7030.240-4M SAT		3130	24,3	128	3786	20,9	50
FIRENZE EVO 2AC4 7030.290-4M SAT		3740	29	128	4521	25,5	50
FIRENZE EVO 2AC4 7030.350-4M SAT		4440	34,8	127	5387	31,1	50
FIRENZE EVO 2AC4 7030.390-4M SAT		4890	38,8	126	5956	34,9	35
FIRENZE EVO 2AC4 7030.420-4M SAT		5210	41,8	124	6377	37,8	35

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(3000K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(3000K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7030.450-4M SAT		5530	45	122	6794	40,7	35
FIRENZE EVO 2AC4 7030.100-5M SAT		1630	13,4	121	2082	10,4	50
FIRENZE EVO 2AC4 7030.110-5M SAT		1800	14,4	124	2275	11,5	50
FIRENZE EVO 2AC4 7030.130-5M SAT		2140	16,5	129	2660	13,7	50
FIRENZE EVO 2AC4 7030.150-5M SAT		2460	18,7	131	3042	15,9	50
FIRENZE EVO 2AC4 7030.180-5M SAT		2950	22,2	132	3610	19,3	50
FIRENZE EVO 2AC4 7030.210-5M SAT		3420	25,8	132	4174	22,7	50
FIRENZE EVO 2AC4 7030.240-5M SAT		3890	29,5	131	4732	26,1	50
FIRENZE EVO 2AC4 7030.290-5M SAT		4640	35,9	129	5651	31,8	50
FIRENZE EVO 2AC4 7030.350-5M SAT		5510	43,7	126	6734	38,9	50
FIRENZE EVO 2AC4 7030.390-5M SAT		6070	48,8	124	7445	43,6	35
FIRENZE EVO 2AC4 7030.420-5M SAT		6480	52,6	123	7971	47,2	35
FIRENZE EVO 2AC4 7030.450-5M SAT		6880	56,2	122	8493	50,8	35
FIRENZE EVO 2AC4 7030.100-6M SAT		1960	15,6	125	2499	12,5	50
FIRENZE EVO 2AC4 7030.110-6M SAT		2160	16,9	127	2730	13,8	50
FIRENZE EVO 2AC4 7030.130-6M SAT		2560	19,6	130	3192	16,5	50
FIRENZE EVO 2AC4 7030.150-6M SAT		2960	22,3	132	3650	19,1	50
FIRENZE EVO 2AC4 7030.180-6M SAT		3540	26,5	133	4332	23,1	50
FIRENZE EVO 2AC4 7030.210-6M SAT		4100	30,8	133	5009	27,2	50
FIRENZE EVO 2AC4 7030.240-6M SAT		4660	35,1	132	5678	31,3	50
FIRENZE EVO 2AC4 7030.290-6M SAT		5560	42,5	130	6781	38,2	50
FIRENZE EVO 2AC4 7030.350-6M SAT		6590	51,6	127	8081	46,6	50
FIRENZE EVO 2AC4 7030.390-6M SAT		7250	57,7	125	8934	52,3	35
FIRENZE EVO 2AC4 7030.420-6M SAT		7730	62,2	124	9566	56,6	35
FIRENZE EVO 2AC4 7030.450-6M SAT		8200	66,8	122	10192	61	35
FIRENZE EVO 2AC4 7030.130-7M SAT		2980	22,8	130	3724	19,2	50
FIRENZE EVO 2AC4 7030.150-7M SAT		3440	26,2	131	4258	22,3	50
FIRENZE EVO 2AC4 7030.180-7M SAT		4110	31,2	131	5055	27	50
FIRENZE EVO 2AC4 7030.210-7M SAT		4770	36,2	131	5843	31,7	50
FIRENZE EVO 2AC4 7030.240-7M SAT		5410	41,2	131	6625	36,5	50
FIRENZE EVO 2AC4 7030.290-7M SAT		6430	49,6	129	7911	44,6	50
FIRENZE EVO 2AC4 7030.350-7M SAT		7610	59,7	127	9428	54,4	35
FIRENZE EVO 2AC4 7030.400-7M SAT		8550	68,3	125	10669	62,7	35
FIRENZE EVO 2AC4 7030.130-8M SAT		3380	25,9	130	4255	21,9	50
FIRENZE EVO 2AC4 7030.150-8M SAT		3900	29,6	131	4867	25,5	50
FIRENZE EVO 2AC4 7030.180-8M SAT		4660	35,3	132	5777	30,9	50
FIRENZE EVO 2AC4 7030.210-8M SAT		5410	40,9	132	6678	36,3	50
FIRENZE EVO 2AC4 7030.240-8M SAT		6130	46,6	131	7571	41,7	50
FIRENZE EVO 2AC4 7030.290-8M SAT		7300	56,1	130	9041	50,9	35
FIRENZE EVO 2AC4 7030.350-8M SAT		8640	67,7	127	10775	62,2	35
FIRENZE EVO 2AC4 7030.130-9M SAT		3790	29,1	130	4787	24,7	50
FIRENZE EVO 2AC4 7030.150-9M SAT		4370	33,3	131	5475	28,7	50
FIRENZE EVO 2AC4 7030.180-9M SAT		5230	39,5	132	6499	34,7	50
FIRENZE EVO 2AC4 7030.210-9M SAT		6060	45,8	132	7513	40,8	50
FIRENZE EVO 2AC4 7030.240-9M SAT		6860	52,1	131	8518	46,9	50
FIRENZE EVO 2AC4 7030.290-9M SAT		8170	62,7	130	10171	57,3	35
FIRENZE EVO 2AC4 7030.350-9M SAT		9660	75,6	127	12121	69,9	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

FIRENZE EVO 2AC4 2700K SAT

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2700K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2700K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7027.100-4M SAT	SL05 SL07 SLE-S SLU-M SLU-S	1250	10,8	115	1614	8,3	50
FIRENZE EVO 2AC4 7027.110-4M SAT		1370	11,8	116	1763	9,2	50
FIRENZE EVO 2AC4 7027.130-4M SAT		1620	13,7	118	2061	11	50
FIRENZE EVO 2AC4 7027.150-4M SAT		1870	15,7	119	2357	12,7	50
FIRENZE EVO 2AC4 7027.180-4M SAT		2240	18,6	120	2798	15,4	50
FIRENZE EVO 2AC4 7027.210-4M SAT		2600	21,4	121	3235	18,1	50
FIRENZE EVO 2AC4 7027.240-4M SAT		2950	24,3	121	3667	20,9	50
FIRENZE EVO 2AC4 7027.290-4M SAT		3520	29	121	4379	25,5	50
FIRENZE EVO 2AC4 7027.350-4M SAT		4170	34,8	119	5219	31,1	50
FIRENZE EVO 2AC4 7027.390-4M SAT		4600	38,8	118	5770	34,9	35
FIRENZE EVO 2AC4 7027.420-4M SAT		4910	41,8	117	6178	37,8	35
FIRENZE EVO 2AC4 7027.450-4M SAT		5210	45	115	6582	40,7	35
FIRENZE EVO 2AC4 7027.100-5M SAT		1540	13,4	114	2017	10,4	50
FIRENZE EVO 2AC4 7027.110-5M SAT		1700	14,4	118	2204	11,5	50
FIRENZE EVO 2AC4 7027.130-5M SAT		2010	16,5	121	2577	13,7	50
FIRENZE EVO 2AC4 7027.150-5M SAT		2320	18,7	124	2947	15,9	50
FIRENZE EVO 2AC4 7027.180-5M SAT		2780	22,2	125	3498	19,3	50
FIRENZE EVO 2AC4 7027.210-5M SAT		3230	25,8	125	4043	22,7	50
FIRENZE EVO 2AC4 7027.240-5M SAT		3670	29,5	124	4584	26,1	50
FIRENZE EVO 2AC4 7027.290-5M SAT		4380	35,9	122	5474	31,8	50
FIRENZE EVO 2AC4 7027.350-5M SAT		5200	43,7	118	6524	38,9	50
FIRENZE EVO 2AC4 7027.390-5M SAT		5720	48,8	117	7212	43,6	35
FIRENZE EVO 2AC4 7027.420-5M SAT		6100	52,6	115	7722	47,2	35
FIRENZE EVO 2AC4 7027.450-5M SAT		6480	56,2	115	8228	50,8	35
FIRENZE EVO 2AC4 7027.100-6M SAT		1840	15,6	117	2421	12,5	50
FIRENZE EVO 2AC4 7027.110-6M SAT		2030	16,9	120	2645	13,8	50
FIRENZE EVO 2AC4 7027.130-6M SAT		2410	19,6	122	3092	16,5	50
FIRENZE EVO 2AC4 7027.150-6M SAT		2780	22,3	124	3536	19,1	50
FIRENZE EVO 2AC4 7027.180-6M SAT		3330	26,5	125	4197	23,1	50
FIRENZE EVO 2AC4 7027.210-6M SAT		3860	30,8	125	4852	27,2	50
FIRENZE EVO 2AC4 7027.240-6M SAT		4390	35,1	125	5501	31,3	50
FIRENZE EVO 2AC4 7027.290-6M SAT		5230	42,5	123	6569	38,2	50
FIRENZE EVO 2AC4 7027.350-6M SAT		6200	51,6	120	7828	46,6	50
FIRENZE EVO 2AC4 7027.390-6M SAT		6820	57,7	118	8654	52,3	35
FIRENZE EVO 2AC4 7027.420-6M SAT		7280	62,2	117	9267	56,6	35
FIRENZE EVO 2AC4 7027.450-6M SAT		7720	66,8	115	9873	61	35
FIRENZE EVO 2AC4 7027.130-7M SAT		2810	22,8	123	3607	19,2	50
FIRENZE EVO 2AC4 7027.150-7M SAT		3240	26,2	123	4125	22,3	50
FIRENZE EVO 2AC4 7027.180-7M SAT		3870	31,2	124	4897	27	50
FIRENZE EVO 2AC4 7027.210-7M SAT		4490	36,2	124	5661	31,7	50
FIRENZE EVO 2AC4 7027.240-7M SAT		5090	41,2	123	6418	36,5	50
FIRENZE EVO 2AC4 7027.290-7M SAT		6060	49,6	122	7664	44,6	50
FIRENZE EVO 2AC4 7027.350-7M SAT		7170	59,7	120	9133	54,4	35
FIRENZE EVO 2AC4 7027.400-7M SAT		8050	68,3	117	10336	62,7	35
FIRENZE EVO 2AC4 7027.130-8M SAT		3190	25,9	123	4123	21,9	50
FIRENZE EVO 2AC4 7027.150-8M SAT		3680	29,6	124	4715	25,5	50
FIRENZE EVO 2AC4 7027.180-8M SAT		4400	35,3	124	5596	30,9	50
FIRENZE EVO 2AC4 7027.210-8M SAT		5100	40,9	124	6469	36,3	50
FIRENZE EVO 2AC4 7027.240-8M SAT		5780	46,6	124	7335	41,7	50
FIRENZE EVO 2AC4 7027.290-8M SAT		6880	56,1	122	8759	50,9	35
FIRENZE EVO 2AC4 7027.350-8M SAT		8130	67,7	120	10438	62,2	35
FIRENZE EVO 2AC4 7027.130-9M SAT		3570	29,1	122	4638	24,7	50
FIRENZE EVO 2AC4 7027.150-9M SAT		4120	33,3	123	5304	28,7	50
FIRENZE EVO 2AC4 7027.180-9M SAT		4920	39,5	124	6296	34,7	50
FIRENZE EVO 2AC4 7027.210-9M SAT		5700	45,8	124	7278	40,8	50
FIRENZE EVO 2AC4 7027.240-9M SAT		6460	52,1	123	8252	46,9	50
FIRENZE EVO 2AC4 7027.290-9M SAT		7690	62,7	122	9854	57,3	35
FIRENZE EVO 2AC4 7027.350-9M SAT		9100	75,6	120	11743	69,9	35
FIRENZE EVO 2AC4 7027.100-4M SAT	SLE-M SLS	1270	10,8	117	1614	8,3	50
FIRENZE EVO 2AC4 7027.110-4M SAT		1400	11,8	118	1763	9,2	50
FIRENZE EVO 2AC4 7027.130-4M SAT		1660	13,7	121	2061	11	50
FIRENZE EVO 2AC4 7027.150-4M SAT		1910	15,7	121	2357	12,7	50
FIRENZE EVO 2AC4 7027.180-4M SAT		2290	18,6	123	2798	15,4	50
FIRENZE EVO 2AC4 7027.210-4M SAT		2660	21,4	124	3235	18,1	50
FIRENZE EVO 2AC4 7027.240-4M SAT		3020	24,3	124	3667	20,9	50
FIRENZE EVO 2AC4 7027.290-4M SAT		3610	29	124	4379	25,5	50
FIRENZE EVO 2AC4 7027.350-4M SAT		4280	34,8	122	5219	31,1	50
FIRENZE EVO 2AC4 7027.390-4M SAT		4720	38,8	121	5770	34,9	35
FIRENZE EVO 2AC4 7027.420-4M SAT		5030	41,8	120	6178	37,8	35

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2700K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2700K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7027.450-4M SAT		5340	45	118	6582	40,7	35
FIRENZE EVO 2AC4 7027.100-5M SAT		1580	13,4	117	2017	10,4	50
FIRENZE EVO 2AC4 7027.110-5M SAT		1740	14,4	120	2204	11,5	50
FIRENZE EVO 2AC4 7027.130-5M SAT		2060	16,5	124	2577	13,7	50
FIRENZE EVO 2AC4 7027.150-5M SAT		2380	18,7	127	2947	15,9	50
FIRENZE EVO 2AC4 7027.180-5M SAT		2850	22,2	128	3498	19,3	50
FIRENZE EVO 2AC4 7027.210-5M SAT		3300	25,8	127	4043	22,7	50
FIRENZE EVO 2AC4 7027.240-5M SAT		3750	29,5	127	4584	26,1	50
FIRENZE EVO 2AC4 7027.290-5M SAT		4480	35,9	124	5474	31,8	50
FIRENZE EVO 2AC4 7027.350-5M SAT		5320	43,7	121	6524	38,9	50
FIRENZE EVO 2AC4 7027.390-5M SAT		5860	48,8	120	7212	43,6	35
FIRENZE EVO 2AC4 7027.420-5M SAT		6250	52,6	118	7722	47,2	35
FIRENZE EVO 2AC4 7027.450-5M SAT		6640	56,2	118	8228	50,8	35
FIRENZE EVO 2AC4 7027.100-6M SAT		1890	15,6	121	2421	12,5	50
FIRENZE EVO 2AC4 7027.110-6M SAT		2090	16,9	123	2645	13,8	50
FIRENZE EVO 2AC4 7027.130-6M SAT		2470	19,6	126	3092	16,5	50
FIRENZE EVO 2AC4 7027.150-6M SAT		2850	22,3	127	3536	19,1	50
FIRENZE EVO 2AC4 7027.180-6M SAT		3410	26,5	128	4197	23,1	50
FIRENZE EVO 2AC4 7027.210-6M SAT		3960	30,8	128	4852	27,2	50
FIRENZE EVO 2AC4 7027.240-6M SAT		4500	35,1	128	5501	31,3	50
FIRENZE EVO 2AC4 7027.290-6M SAT		5360	42,5	126	6569	38,2	50
FIRENZE EVO 2AC4 7027.350-6M SAT		6360	51,6	123	7828	46,6	50
FIRENZE EVO 2AC4 7027.390-6M SAT		6990	57,7	121	8654	52,3	35
FIRENZE EVO 2AC4 7027.420-6M SAT		7460	62,2	119	9267	56,6	35
FIRENZE EVO 2AC4 7027.450-6M SAT		7910	66,8	118	9873	61	35
FIRENZE EVO 2AC4 7027.130-7M SAT		2880	22,8	126	3607	19,2	50
FIRENZE EVO 2AC4 7027.150-7M SAT		3320	26,2	126	4125	22,3	50
FIRENZE EVO 2AC4 7027.180-7M SAT		3970	31,2	127	4897	27	50
FIRENZE EVO 2AC4 7027.210-7M SAT		4600	36,2	127	5661	31,7	50
FIRENZE EVO 2AC4 7027.240-7M SAT		5220	41,2	126	6418	36,5	50
FIRENZE EVO 2AC4 7027.290-7M SAT		6210	49,6	125	7664	44,6	50
FIRENZE EVO 2AC4 7027.350-7M SAT		7350	59,7	123	9133	54,4	35
FIRENZE EVO 2AC4 7027.400-7M SAT		8250	68,3	120	10336	62,7	35
FIRENZE EVO 2AC4 7027.130-8M SAT		3260	25,9	125	4123	21,9	50
FIRENZE EVO 2AC4 7027.150-8M SAT		3770	29,6	127	4715	25,5	50
FIRENZE EVO 2AC4 7027.180-8M SAT		4500	35,3	127	5596	30,9	50
FIRENZE EVO 2AC4 7027.210-8M SAT		5220	40,9	127	6469	36,3	50
FIRENZE EVO 2AC4 7027.240-8M SAT		5920	46,6	127	7335	41,7	50
FIRENZE EVO 2AC4 7027.290-8M SAT		7050	56,1	125	8759	50,9	35
FIRENZE EVO 2AC4 7027.350-8M SAT		8340	67,7	123	10438	62,2	35
FIRENZE EVO 2AC4 7027.130-9M SAT		3660	29,1	125	4638	24,7	50
FIRENZE EVO 2AC4 7027.150-9M SAT		4220	33,3	126	5304	28,7	50
FIRENZE EVO 2AC4 7027.180-9M SAT		5040	39,5	127	6296	34,7	50
FIRENZE EVO 2AC4 7027.210-9M SAT		5840	45,8	127	7278	40,8	50
FIRENZE EVO 2AC4 7027.240-9M SAT		6620	52,1	127	8252	46,9	50
FIRENZE EVO 2AC4 7027.290-9M SAT		7880	62,7	125	9854	57,3	35
FIRENZE EVO 2AC4 7027.350-9M SAT		9320	75,6	123	11743	69,9	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.

FIRENZE EVO 2AC4 2200K SAT

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2200K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2200K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7022.100-4M SAT	SL05 SL07 SLE-S SLU-M SLU-S	1130	10,8	104	1458	8,3	50
FIRENZE EVO 2AC4 7022.110-4M SAT		1240	11,8	105	1593	9,2	50
FIRENZE EVO 2AC4 7022.130-4M SAT		1470	13,7	107	1862	11	50
FIRENZE EVO 2AC4 7022.150-4M SAT		1690	15,7	107	2129	12,7	50
FIRENZE EVO 2AC4 7022.180-4M SAT		2020	18,6	108	2527	15,4	50
FIRENZE EVO 2AC4 7022.210-4M SAT		2350	21,4	109	2922	18,1	50
FIRENZE EVO 2AC4 7022.240-4M SAT		2660	24,3	109	3312	20,9	50
FIRENZE EVO 2AC4 7022.290-4M SAT		3180	29	109	3956	25,5	50
FIRENZE EVO 2AC4 7022.350-4M SAT		3770	34,8	108	4714	31,1	50
FIRENZE EVO 2AC4 7022.390-4M SAT		4150	38,8	106	5211	34,9	35
FIRENZE EVO 2AC4 7022.420-4M SAT		4430	41,8	105	5580	37,8	35
FIRENZE EVO 2AC4 7022.450-4M SAT		4710	45	104	5945	40,7	35
FIRENZE EVO 2AC4 7022.100-5M SAT		1400	13,4	104	1822	10,4	50
FIRENZE EVO 2AC4 7022.110-5M SAT		1540	14,4	106	1991	11,5	50
FIRENZE EVO 2AC4 7022.130-5M SAT		1820	16,5	110	2327	13,7	50
FIRENZE EVO 2AC4 7022.150-5M SAT		2100	18,7	112	2661	15,9	50
FIRENZE EVO 2AC4 7022.180-5M SAT		2510	22,2	113	3159	19,3	50
FIRENZE EVO 2AC4 7022.210-5M SAT		2920	25,8	113	3652	22,7	50
FIRENZE EVO 2AC4 7022.240-5M SAT		3310	29,5	112	4141	26,1	50
FIRENZE EVO 2AC4 7022.290-5M SAT		3950	35,9	110	4944	31,8	50
FIRENZE EVO 2AC4 7022.350-5M SAT		4700	43,7	107	5892	38,9	50
FIRENZE EVO 2AC4 7022.390-5M SAT		5170	48,8	105	6514	43,6	35
FIRENZE EVO 2AC4 7022.420-5M SAT		5520	52,6	104	6975	47,2	35
FIRENZE EVO 2AC4 7022.450-5M SAT		5850	56,2	104	7431	50,8	35
FIRENZE EVO 2AC4 7022.100-6M SAT		1670	15,6	107	2186	12,5	50
FIRENZE EVO 2AC4 7022.110-6M SAT		1840	16,9	108	2389	13,8	50
FIRENZE EVO 2AC4 7022.130-6M SAT		2180	19,6	111	2793	16,5	50
FIRENZE EVO 2AC4 7022.150-6M SAT		2510	22,3	112	3194	19,1	50
FIRENZE EVO 2AC4 7022.180-6M SAT		3010	26,5	113	3791	23,1	50
FIRENZE EVO 2AC4 7022.210-6M SAT		3490	30,8	113	4383	27,2	50
FIRENZE EVO 2AC4 7022.240-6M SAT		3960	35,1	112	4969	31,3	50
FIRENZE EVO 2AC4 7022.290-6M SAT		4730	42,5	111	5933	38,2	50
FIRENZE EVO 2AC4 7022.350-6M SAT		5600	51,6	108	7071	46,6	50
FIRENZE EVO 2AC4 7022.390-6M SAT		6160	57,7	106	7817	52,3	35
FIRENZE EVO 2AC4 7022.420-6M SAT		6570	62,2	105	8370	56,6	35
FIRENZE EVO 2AC4 7022.450-6M SAT		6970	66,8	104	8918	61	35
FIRENZE EVO 2AC4 7022.130-7M SAT		2540	22,8	111	3258	19,2	50
FIRENZE EVO 2AC4 7022.150-7M SAT		2930	26,2	111	3726	22,3	50
FIRENZE EVO 2AC4 7022.180-7M SAT		3500	31,2	112	4423	27	50
FIRENZE EVO 2AC4 7022.210-7M SAT		4060	36,2	112	5113	31,7	50
FIRENZE EVO 2AC4 7022.240-7M SAT		4600	41,2	111	5797	36,5	50
FIRENZE EVO 2AC4 7022.290-7M SAT		5480	49,6	110	6922	44,6	50
FIRENZE EVO 2AC4 7022.350-7M SAT		6480	59,7	108	8249	54,4	35
FIRENZE EVO 2AC4 7022.400-7M SAT		7280	68,3	106	9336	62,7	35
FIRENZE EVO 2AC4 7022.130-8M SAT		2880	25,9	111	3724	21,9	50
FIRENZE EVO 2AC4 7022.150-8M SAT		3320	29,6	112	4258	25,5	50
FIRENZE EVO 2AC4 7022.180-8M SAT		3970	35,3	112	5055	30,9	50
FIRENZE EVO 2AC4 7022.210-8M SAT		4600	40,9	112	5843	36,3	50
FIRENZE EVO 2AC4 7022.240-8M SAT		5220	46,6	112	6625	41,7	50
FIRENZE EVO 2AC4 7022.290-8M SAT		6210	56,1	110	7911	50,9	35
FIRENZE EVO 2AC4 7022.350-8M SAT		7350	67,7	108	9428	62,2	35
FIRENZE EVO 2AC4 7022.130-9M SAT		3230	29,1	110	4189	24,7	50
FIRENZE EVO 2AC4 7022.150-9M SAT		3720	33,3	111	4791	28,7	50
FIRENZE EVO 2AC4 7022.180-9M SAT		4450	39,5	112	5686	34,7	50
FIRENZE EVO 2AC4 7022.210-9M SAT		5150	45,8	112	6574	40,8	50
FIRENZE EVO 2AC4 7022.240-9M SAT		5840	52,1	112	7453	46,9	50
FIRENZE EVO 2AC4 7022.290-9M SAT		6950	62,7	110	8900	57,3	35
FIRENZE EVO 2AC4 7022.350-9M SAT		8220	75,6	108	10606	69,9	35
FIRENZE EVO 2AC4 7022.100-4M SAT	SLE-M SLS	1150	10,8	106	1458	8,3	50
FIRENZE EVO 2AC4 7022.110-4M SAT		1260	11,8	106	1593	9,2	50
FIRENZE EVO 2AC4 7022.130-4M SAT		1500	13,7	109	1862	11	50
FIRENZE EVO 2AC4 7022.150-4M SAT		1730	15,7	110	2129	12,7	50
FIRENZE EVO 2AC4 7022.180-4M SAT		2070	18,6	111	2527	15,4	50
FIRENZE EVO 2AC4 7022.210-4M SAT		2400	21,4	112	2922	18,1	50
FIRENZE EVO 2AC4 7022.240-4M SAT		2730	24,3	112	3312	20,9	50
FIRENZE EVO 2AC4 7022.290-4M SAT		3260	29	112	3956	25,5	50
FIRENZE EVO 2AC4 7022.350-4M SAT		3870	34,8	111	4714	31,1	50
FIRENZE EVO 2AC4 7022.390-4M SAT		4260	38,8	109	5211	34,9	35
FIRENZE EVO 2AC4 7022.420-4M SAT		4550	41,8	108	5580	37,8	35

LUMINAIRE	OPTIC	RATED LUMINAIRE FLUX*(2200K, lm)	RATED LUMINAIRE POWER*(W)	LUMINAIRE EFFICACY (lm/W)	RATED LED FLUX*(2200K, lm)	RATED LED POWER*(W)	Ta MAX (°C)
FIRENZE EVO 2AC4 7022.450-4M SAT		4830	45	107	5945	40,7	35
FIRENZE EVO 2AC4 7022.100-5M SAT		1430	13,4	106	1822	10,4	50
FIRENZE EVO 2AC4 7022.110-5M SAT		1570	14,4	109	1991	11,5	50
FIRENZE EVO 2AC4 7022.130-5M SAT		1860	16,5	112	2327	13,7	50
FIRENZE EVO 2AC4 7022.150-5M SAT		2150	18,7	114	2661	15,9	50
FIRENZE EVO 2AC4 7022.180-5M SAT		2570	22,2	115	3159	19,3	50
FIRENZE EVO 2AC4 7022.210-5M SAT		2990	25,8	115	3652	22,7	50
FIRENZE EVO 2AC4 7022.240-5M SAT		3390	29,5	114	4141	26,1	50
FIRENZE EVO 2AC4 7022.290-5M SAT		4050	35,9	112	4944	31,8	50
FIRENZE EVO 2AC4 7022.350-5M SAT		4810	43,7	110	5892	38,9	50
FIRENZE EVO 2AC4 7022.390-5M SAT		5290	48,8	108	6514	43,6	35
FIRENZE EVO 2AC4 7022.420-5M SAT		5650	52,6	107	6975	47,2	35
FIRENZE EVO 2AC4 7022.450-5M SAT		6000	56,2	106	7431	50,8	35
FIRENZE EVO 2AC4 7022.100-6M SAT		1710	15,6	109	2186	12,5	50
FIRENZE EVO 2AC4 7022.110-6M SAT		1890	16,9	111	2389	13,8	50
FIRENZE EVO 2AC4 7022.130-6M SAT		2230	19,6	113	2793	16,5	50
FIRENZE EVO 2AC4 7022.150-6M SAT		2580	22,3	115	3194	19,1	50
FIRENZE EVO 2AC4 7022.180-6M SAT		3080	26,5	116	3791	23,1	50
FIRENZE EVO 2AC4 7022.210-6M SAT		3580	30,8	116	4383	27,2	50
FIRENZE EVO 2AC4 7022.240-6M SAT		4060	35,1	115	4969	31,3	50
FIRENZE EVO 2AC4 7022.290-6M SAT		4850	42,5	114	5933	38,2	50
FIRENZE EVO 2AC4 7022.350-6M SAT		5750	51,6	111	7071	46,6	50
FIRENZE EVO 2AC4 7022.390-6M SAT		6320	57,7	109	7817	52,3	35
FIRENZE EVO 2AC4 7022.420-6M SAT		6740	62,2	108	8370	56,6	35
FIRENZE EVO 2AC4 7022.450-6M SAT		7150	66,8	107	8918	61	35
FIRENZE EVO 2AC4 7022.130-7M SAT		2600	22,8	114	3258	19,2	50
FIRENZE EVO 2AC4 7022.150-7M SAT		3000	26,2	114	3726	22,3	50
FIRENZE EVO 2AC4 7022.180-7M SAT		3590	31,2	115	4423	27	50
FIRENZE EVO 2AC4 7022.210-7M SAT		4160	36,2	114	5113	31,7	50
FIRENZE EVO 2AC4 7022.240-7M SAT		4720	41,2	114	5797	36,5	50
FIRENZE EVO 2AC4 7022.290-7M SAT		5610	49,6	113	6922	44,6	50
FIRENZE EVO 2AC4 7022.350-7M SAT		6640	59,7	111	8249	54,4	35
FIRENZE EVO 2AC4 7022.400-7M SAT		7450	68,3	109	9336	62,7	35
FIRENZE EVO 2AC4 7022.130-8M SAT		2950	25,9	113	3724	21,9	50
FIRENZE EVO 2AC4 7022.150-8M SAT		3400	29,6	114	4258	25,5	50
FIRENZE EVO 2AC4 7022.180-8M SAT		4070	35,3	115	5055	30,9	50
FIRENZE EVO 2AC4 7022.210-8M SAT		4720	40,9	115	5843	36,3	50
FIRENZE EVO 2AC4 7022.240-8M SAT		5350	46,6	114	6625	41,7	50
FIRENZE EVO 2AC4 7022.290-8M SAT		6370	56,1	113	7911	50,9	35
FIRENZE EVO 2AC4 7022.350-8M SAT		7540	67,7	111	9428	62,2	35
FIRENZE EVO 2AC4 7022.130-9M SAT		3310	29,1	113	4189	24,7	50
FIRENZE EVO 2AC4 7022.150-9M SAT		3810	33,3	114	4791	28,7	50
FIRENZE EVO 2AC4 7022.180-9M SAT		4560	39,5	115	5686	34,7	50
FIRENZE EVO 2AC4 7022.210-9M SAT		5280	45,8	115	6574	40,8	50
FIRENZE EVO 2AC4 7022.240-9M SAT		5990	52,1	114	7453	46,9	50
FIRENZE EVO 2AC4 7022.290-9M SAT		7120	62,7	113	8900	57,3	35
FIRENZE EVO 2AC4 7022.350-9M SAT		8420	75,6	111	10606	69,9	35

*RATED LUMINAIRE FLUX / RATED LUMINAIRE POWER: Rated data obtained in laboratory. Tq=25°C, Vin=230Vac, F/DA/DAC.

*RATED LED FLUX / RATED LED POWER: Rated data extrapolated from LED manufacturer datasheet. Tj=85°C.

Values indicated in this technical sheet are to be considered rated values. Flux tolerance: ±7%. Power tolerance: ±7%.

Power tolerance with ZHAGA version or power supply D4i/SR: ±10%.

The characteristics of the product listed above are subjected to change without notice.